

RM-10-HC **Glass Door Merchandiser with Swing Door**









RM-10-HC

ANSI / NSF 7





Interior Storage Capacity (CF)	10 ft ³
Overall Width x Depth	25" x 22.5"
Height	54.75"
Depth with Door Open	46.7"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21" x 17.5"
Crated Shipping Weight	230 lbs.
Crated Width x Depth x Height	30" x 28" x 60"
Electrical / Refrigeration	One Section RM-10-HC
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 🕕
Voltage Range	104-126

Electrical Connection (NEMA)	5-15P 🕕
Voltage Range	104-126
Ambient Temp. Range	60° to 86°F
Control Setpoint Range	32° to 39°F
Amperage	1.8
Energy Consumption (kWh/day) @ASHRAE	1.1

□ Organizer shelf (HS-5446) □ 4" Casters (HS-5288) □ Price tag holder (HS-5290) □ 2.25" Casters (HS-5037)

Options

Approx. Nominal Compres. BTU/HR (HP)

Refrigerant / Charge Amount (oz)

□ Epoxy Shelf (HS-5447)



Warranty

RM-10-HC-WHT

3

One Section

RM-10-HC

NATURAL

CTORY WARRANT



RM-10-HC 04/08/24 Item # 13546

tem #:	
Project:	
Qty:	
NA#:	

Features

- Curved vertical corners with silver/black/ white aluminum exterior provide enhanced product display
- Forced air evaporator for quick temperature pull down
- Energy saving hot gas loop on front edge of cabinet helps prevent condensation
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled products.
- Large glass door is energy efficient Low-E multi pane alass
- Door is mounted on heavy duty hinges with selfclosing mechanism
- Energy efficient vertical LED interior lights illuminate products on display
- Silver painted aluminum exterior with NSF approved white steel interior and stainless steel floor
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- (3) white epoxy coated shelves per section with product stops are standard
- Stackable (two units high) to conserve warehouse floor space
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- 2 inch leveling legs standard
- · Exterior finish available in silver, white, and black

Capacity:

20 oz. bottles: 168 12 oz. bottles: 288

Container Qty: 54

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.

841(1/5HP)


R290 / (1.8oz)




RM-10-HC Glass Door Merchandiser with Swing Door

FRONT VIEW

SIDE VIEW

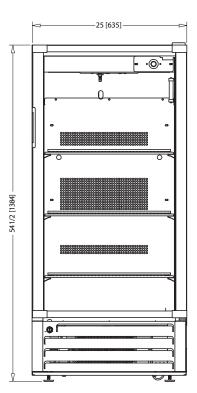

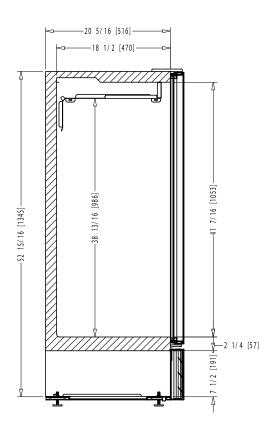

HEADER DIMS PLAN VIEW 25 [635] 1 3/4 [44]--21 1/2 [546]--1 3/4 [44] - 21 5/16" -20 5/16 [516] **RM-10-HC HEADER SIGN** -22 1/2 [572] 18 1/2 [470] 1/2" SIGN DIMENSIONS ° 1 (Visible Area) 1168.7 Graphic Requirements: • 360 dpi resolution. Scale 1=1 · Colors for CMYK process • Image with 1/4" of excess by side [635] • Graphics must be saved in photoshop (with layers) 25 - (or your sign company file type requirements) • Include a full color print out Material Requirements: • 3M exterior grade UV resistant vinyl adhesive Note: Texts and important parts of the image should be within the visible area. The visible area is illustrated by dotted lines when it applies.

© HOSHIZAKI AMERICA, INC. 618 Hwy. 74 S., Peachtree City, GA 30269 | TEL 800-438-6087 | FAX 800-345-1325 | www.hoshizakiamerica.com