



NO:	73076
ISSUED:	OCT. 8, 1998
REVISED:	DEC. 14, 2003

HOSHIZAKI STACKABLE CRESCENT CUBER

**MODELS KM-1300SAF
 KM-1300SWF
 KM-1300SRF
 KM-1300SAF3
 KM-1300SWF3
 KM-1300SRF3**

SERVICE MANUAL

IMPORTANT

Only qualified service technicians should attempt to service or maintain this icemaker. No such service or maintenance should be undertaken until the technician has thoroughly read this Service Manual.

HOSHIZAKI provides this manual primarily to assist qualified service technicians in the service and maintenance of the icemaker.

Should the reader have any questions or concerns which have not been satisfactorily addressed, please call or write to the HOSHIZAKI Technical Support Department for assistance.

HOSHIZAKI AMERICA, INC.
618 Highway 74 South
Peachtree City, GA 30269

Attn: HOSHIZAKI Technical Support Department

Phone: 1-800-233-1940 Technical Service
(770) 487-2331
Fax: (770) 487-3360

NOTE: To expedite assistance, all correspondence/communication **MUST** include the following information:

- Model Number
- Serial Number
- Complete and detailed explanation of the problem

Please review this manual. It should be read carefully before the icemaker is serviced or maintenance operations are performed. Only qualified service technicians should service and maintain the icemaker. This manual should be made available to the technician prior to service or maintenance.

CONTENTS

	PAGE
I. SPECIFICATIONS	5
1. KM-1300SAF (Air-cooled)	5
2. KM-1300SWF (Water-cooled)	6
3. KM-1300SRF (Remote air-cooled)	7
4. KM-1300SAF3 (Air-cooled, 3 phase)	8
5. KM-1300SWF3 (Water-cooled, 3 phase)	9
6. KM-1300SRF3 (Remote air-cooled, 3 phase)	10
7. CONDENSING UNIT, URC-12F	11
II. GENERAL INFORMATION	13
1. CONSTRUCTION	13
[a] KM-1300SAF/3	13
[b] KM-1300SWF/3	14
[c] KM-1300SRF/3	15
2. CONTROLLER BOARD	16
[a] SOLID-STATE CONTROL	16
[b] CONTROLLER BOARD	16
[c] SEQUENCE	23
[d] CONTROLS AND ADJUSTMENTS	26
[e] CHECKING THE CONTROLLER BOARD	29
III. TECHNICAL INFORMATION	32
1. WATER CIRCUIT AND REFRIGERANT CIRCUIT	32
[a] KM-1300SAF/3	32
[b] KM-1300SWF/3	33
[c] KM-1300SRF/3	34
2. WIRING DIAGRAMS	35
[a] KM-1300SAF	35
[b] KM-1300SWF	36
[c] KM-1300SRF	37
[d] KM-1300SAF3	38
[e] KM-1300SWF3	39
[f] KM-1300SRF3	40
3. TIMING CHART	41
4. PERFORMANCE DATA	43
[a] KM-1300SAF	43
[b] KM-1300SWF	44
[c] KM-1300SRF	45
[d] KM-1300SAF3	46
[e] KM-1300SWF3	47
[f] KM-1300SRF3	48

IV. SERVICE DIAGNOSIS	49
1. NO ICE PRODUCTION	49
2. EVAPORATOR IS FROZEN UP	52
3. LOW ICE PRODUCTION	53
4. ABNORMAL ICE	53
5. OTHERS	53
V. REMOVAL AND REPLACEMENT OF COMPONENTS	54
1. SERVICE FOR REFRIGERANT LINES	54
[a] REFRIGERANT RECOVERY	54
[b] EVACUATION AND RECHARGE	54
2. BRAZING	55
3. REMOVAL AND REPLACEMENT OF COMPRESSOR	56
4. REMOVAL AND REPLACEMENT OF DRIER	57
5. REMOVAL AND REPLACEMENT OF EXPANSION VALVE	58
6. REMOVAL AND REPLACEMENT OF HOT GAS VALVE, LINE VALVE AND GAS VALVE	59
7. REMOVAL AND REPLACEMENT OF EVAPORATOR	60
8. REMOVAL AND REPLACEMENT OF WATER-REGULATING VALVE - WATER COOLED MODEL ONLY	61
9. ADJUSTMENT OF WATER-REGULATING VALVE - WATER COOLED MODEL ONLY	62
10. REMOVAL AND REPLACEMENT OF CONDENSING PRESSURE REGULATOR (C.P.R.) - REMOTE AIR-COOLED MODEL ONLY	63
11. REMOVAL AND REPLACEMENT OF THERMISTOR	64
12. REMOVAL AND REPLACEMENT OF FAN MOTOR	65
13. REMOVAL AND REPLACEMENT OF WATER VALVE	66
14. REMOVAL AND REPLACEMENT OF PUMP MOTOR	66
15. REMOVAL AND REPLACEMENT OF SPRAY TUBES	67
VI. MAINTENANCE AND CLEANING INSTRUCTIONS	68
1. PREPARING THE ICEMAKER FOR LONG STORAGE	68
2. CLEANING PROCEDURE	70
[a] CLEANING PROCEDURE	71
[b] SANITIZING PROCEDURE	73
3. MAINTENANCE	74

I. SPECIFICATIONS

1. KM-1300SAF (Air-cooled)

AC SUPPLY VOLTAGE	208-230/60/1 (3 wire with neutral for 115 V)																									
AMPERAGE	12.6 A (5 min. freeze AT 104° F / WT 80° F)																									
MINIMUM CIRCUIT AMPACITY	20A																									
MAXIMUM FUSE SIZE	20A																									
APPROX. ICE PRODUCTION PER 24 HR.	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. (°F)</th> <th colspan="3">Water Temp. (°F)</th> </tr> <tr> <th>50</th> <th>70</th> <th>90</th> </tr> </thead> <tbody> <tr> <td>70</td> <td>*1283 (582)</td> <td>1238 (562)</td> <td>1135 (515)</td> </tr> <tr> <td>80</td> <td>1249 (566)</td> <td>1178 (535)</td> <td>1053 (478)</td> </tr> <tr> <td>90</td> <td>1238 (562)</td> <td>*1129 (512)</td> <td>1011 (458)</td> </tr> <tr> <td>100</td> <td>1203 (546)</td> <td>1101 (500)</td> <td>*902 (409)</td> </tr> </tbody> </table>			Ambient Temp. (°F)	Water Temp. (°F)			50	70	90	70	*1283 (582)	1238 (562)	1135 (515)	80	1249 (566)	1178 (535)	1053 (478)	90	1238 (562)	*1129 (512)	1011 (458)	100	1203 (546)	1101 (500)	*902 (409)
Ambient Temp. (°F)	Water Temp. (°F)																									
	50	70	90																							
70	*1283 (582)	1238 (562)	1135 (515)																							
80	1249 (566)	1178 (535)	1053 (478)																							
90	1238 (562)	*1129 (512)	1011 (458)																							
100	1203 (546)	1101 (500)	*902 (409)																							
lbs./day (kg./day)																										
Reference without *marks																										
SHAPE OF ICE	Crescent Cube																									
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.																									
APPROXIMATE STORAGE CAPACITY	N/A																									
ELECTRIC & WATER CONSUMPTION	90° F / 70° F	70° F / 50° F																								
ELECTRIC W (KWH/100 lbs.)	2235 (4.75)	2180 (4.08)																								
WATER gal./24 HR. (gal./100 lbs.)	247 (21.9)	479 (37.3)																								
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)																									
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)																									
WEIGHT	Net 275 lbs. (125 kg.) Shipping 315 lbs. (143 kg.)																									
CONNECTIONS - ELECTRIC	Permanent Connection																									
- WATER SUPPLY	Inlet 1 ¹ / ₂ " FPT																									
- DRAIN	Outlet 3 ¹ / ₄ " FPT																									
	3 ¹ / ₈ " ID Pipe																									
CUBE CONTROL SYSTEM	Float Switch																									
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer																									
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe																									
COOLING WATER CONTROL	N/A																									
BIN CONTROL SYSTEM	Thermostat																									
COMPRESSOR	Hermetic, Model CS14K6E-PFV																									
CONDENSER	Air-cooled, Fin and Tube type																									
EVAPORATOR	Vertical type, Stainless Steel and Copper																									
REFRIGERANT CONTROL	Thermostatic Expansion Valve																									
REFRIGERANT CHARGE	R404A, 3 lbs. 14 oz. (1750 g.)																									
DESIGN PRESSURE	High 467 PSIG, Low 230 PSIG																									
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out (Internal)																									
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)																									
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch																									
LOW WATER PROTECTION	Float Switch																									
ACCESSORIES - SUPPLIED	N/A																									
- REQUIRED	Ice Storage Bin																									
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 264 V																								
	AMBIENT TEMP.	45 - 100° F																								
	WATER SUPPLY TEMP.	45 - 90° F																								
	WATER SUPPLY PRESS.	10 - 113 PSIG																								

We reserve the right to make changes in specifications and design without prior notice.

2. KM-1300SWF (Water-cooled)

AC SUPPLY VOLTAGE	208-230/60/1 (3 wire with neutral for 115 V)																									
AMPERAGE	9.7 A (5 MIN. Freeze AT 104° F / WT 80° F)																									
MINIMUM CIRCUIT AMPACITY	20A																									
MAXIMUM FUSE SIZE	20A																									
APPROX. ICE PRODUCTION	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. (°F)</th> <th colspan="3">Water Temp. (°F)</th> </tr> <tr> <th>50</th> <th>70</th> <th>90</th> </tr> </thead> <tbody> <tr> <td>70</td> <td>*1252 (568)</td> <td>1233 (559)</td> <td>1176 (533)</td> </tr> <tr> <td>80</td> <td>1238 (561)</td> <td>1209 (548)</td> <td>1134 (514)</td> </tr> <tr> <td>90</td> <td>1233 (559)</td> <td>*1188 (539)</td> <td>1119 (508)</td> </tr> <tr> <td>100</td> <td>1211 (549)</td> <td>1172 (532)</td> <td>1056 (479)</td> </tr> </tbody> </table>			Ambient Temp. (°F)	Water Temp. (°F)			50	70	90	70	*1252 (568)	1233 (559)	1176 (533)	80	1238 (561)	1209 (548)	1134 (514)	90	1233 (559)	*1188 (539)	1119 (508)	100	1211 (549)	1172 (532)	1056 (479)
Ambient Temp. (°F)					Water Temp. (°F)																					
	50	70	90																							
70	*1252 (568)	1233 (559)	1176 (533)																							
80	1238 (561)	1209 (548)	1134 (514)																							
90	1233 (559)	*1188 (539)	1119 (508)																							
100	1211 (549)	1172 (532)	1056 (479)																							
PER 24 HR.																										
lbs./day (kg./day)																										
Reference without *marks																										
SHAPE OF ICE	Crescent Cube																									
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.																									
APPROXIMATE STORAGE CAPACITY	N/A																									
ELECTRIC & WATER CONSUMPTION	90° F / 70° F	70° F / 50° F																								
ELECTRIC W (KWH/100 lbs.)	2050 (4.0)	1975 (3.8)																								
WATER gal./24 HR. (gal./100 lbs.)	325 (27.4)	623 (49.8)																								
WATER COOLED CONDENSER	1521 (128)	964 (77)																								
gal./24 hr. (gal./100 lbs.)																										
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)																									
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)																									
WEIGHT	Net 265 lbs. (120 kg.) Shipping 315 lbs. (143 kg.)																									
CONNECTIONS - ELECTRIC	Permanent Connection																									
- WATER SUPPLY	Inlet	1 ¹ / ₂ " FPT	Condenser Inlet 1 ¹ / ₂ " FPT																							
- DRAIN	Outlet	3 ¹ / ₄ " FPT	Condenser Outlet 3 ¹ / ₈ " FPT																							
		3 ¹ / ₈ " ID Pipe																								
CUBE CONTROL SYSTEM	Float Switch																									
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer																									
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe																									
COOLING WATER CONTROL	Water Regulator																									
BIN CONTROL SYSTEM	Thermostat																									
COMPRESSOR	Hermetic, Model CS14K6E-PFV																									
CONDENSER	Water-cooled, Tube in Tube type																									
EVAPORATOR	Vertical type, Stainless Steel and Copper																									
REFRIGERANT CONTROL	Thermostatic Expansion Valve																									
REFRIGERANT CHARGE	R404A, 2 lb. 2 oz. (950 g.)																									
DESIGN PRESSURE	High 427 PSIG, Low 230 PSIG																									
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out (Internal)																									
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)																									
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch																									
LOW WATER PROTECTION	Float Switch																									
ACCESSORIES - SUPPLIED	N/A																									
- REQUIRED	Ice Storage Bin																									
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 253 V																								
	AMBIENT TEMP.	45 - 100° F																								
	WATER SUPPLY TEMP.	45 - 90° F																								
	WATER SUPPLY PRESS.	10 - 113 PSIG																								

We reserve the right to make changes in specifications and design without prior notice.

3. KM-1300SRF (Remote air-cooled)

AC SUPPLY VOLTAGE	208-230/60/1 (3 wire with neutral for 115 V)		
AMPERAGE	14.5 A (5 min. freeze AT 104° F / WT 80° F)		
MINIMUM CIRCUIT AMPACITY	20A		
MAXIMUM FUSE SIZE	20A		
APPROX. ICE PRODUCTION REFERENCE PER 24 HR.	Ambient Temp. (°F)	Water Temp. (°F)	
lbs./day (kg./day)		50	70
Reference without *marks		90	
	70	*1296 (588)	1248 (566)
	80	1260 (571)	1185 (538)
	90	1248 (566)	*1133 (514)
	100	1230 (558)	1114 (505)
			*980 (445)
SHAPE OF ICE	Crescent Cube		
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.		
APPROXIMATE STORAGE CAPACITY	N/A		
ELECTRIC & WATER CONSUMPTION	90°F/70°F	70°F/50°F	
ELECTRIC W (KWH/100 lbs.)	2350 (4.98)	2300 (4.26)	
WATER gal./24 HR. (gal./100 lbs.)	273 (24.1)	456 (35.2)	
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)		
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)		
WEIGHT	Net 255 lbs. (116 kg.) Shipping 315 lbs. (143 kg.)		
CONNECTIONS - ELECTRIC	Permanent Connection		
- WATER SUPPLY	Inlet 1 ¹ / ₂ " FPT		
- DRAIN	Outlet 3 ¹ / ₄ " FPT		
	3 ¹ / ₈ " ID Pipe		
CUBE CONTROL SYSTEM	Float Switch		
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer		
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe		
COOLING WATER CONTROL	N/A		
BIN CONTROL SYSTEM	Thermostat		
COMPRESSOR	Hermetic, Model CS14K6E-PFV		
CONDENSER	Air-cooled remote, Condenser Unit URC-12F recommended		
EVAPORATOR	Vertical type, Stainless Steel and Copper		
REFRIGERANT CONTROL	Thermostatic Expansion Valve, Condensing Pressure Regulator on URC-12F		
REFRIGERANT CHARGE	R404A, 11 lbs. 7 oz. (5200 g.) (Ice maker 7 lbs.; Cond. unit 4 lbs. 7 oz.)		
DESIGN PRESSURE	HIGH 467 PSIG, LOW 230 PSIG		
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out (Internal)		
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)		
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch		
LOW WATER PROTECTION	Float Switch		
ACCESSORIES - SUPPLIED	N/A		
- REQUIRED	Ice Storage Bin, Remote Condenser Unit		
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 264 V	
	AMBIENT TEMP.	45 - 100° F	
	WATER SUPPLY TEMP.	45 - 90° F	
	WATER SUPPLY PRESS.	10 - 113 PSIG	

We reserve the right to make changes in specifications and design without prior notice.

4. KM-1300SAF3 (Air-cooled)

AC SUPPLY VOLTAGE	208-230/60/3																									
AMPERAGE	7.8 A (5 min. freeze AT 104° F / WT 80° F)																									
MINIMUM CIRCUIT AMPACITY	20A																									
MAXIMUM FUSE SIZE	20A																									
APPROX. ICE PRODUCTION PER 24 HR.	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. (°F)</th> <th colspan="3">Water Temp. (°F)</th> </tr> <tr> <th>50</th> <th>70</th> <th>90</th> </tr> </thead> <tbody> <tr> <td>70</td> <td>*1320 (599)</td> <td>1257 (570)</td> <td>1153 (523)</td> </tr> <tr> <td>80</td> <td>1272 (577)</td> <td>1174 (533)</td> <td>1060 (481)</td> </tr> <tr> <td>90</td> <td>1257 (570)</td> <td>*1105 (501)</td> <td>993 (450)</td> </tr> <tr> <td>100</td> <td>1230 (558)</td> <td>1079 (489)</td> <td>*890 (404)</td> </tr> </tbody> </table>			Ambient Temp. (°F)	Water Temp. (°F)			50	70	90	70	*1320 (599)	1257 (570)	1153 (523)	80	1272 (577)	1174 (533)	1060 (481)	90	1257 (570)	*1105 (501)	993 (450)	100	1230 (558)	1079 (489)	*890 (404)
Ambient Temp. (°F)	Water Temp. (°F)																									
	50	70	90																							
70	*1320 (599)	1257 (570)	1153 (523)																							
80	1272 (577)	1174 (533)	1060 (481)																							
90	1257 (570)	*1105 (501)	993 (450)																							
100	1230 (558)	1079 (489)	*890 (404)																							
lbs./day (kg./day)																										
Reference without *marks																										
SHAPE OF ICE	Crescent Cube																									
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.																									
APPROXIMATE STORAGE CAPACITY	N/A																									
ELECTRIC & WATER CONSUMPTION	90° F / 70° F	70° F / 50° F																								
ELECTRIC W (KWH/100 lbs.)	2275 (5.0)	2150 (3.9)																								
WATER gal./24 HR. (gal./100 lbs.)	292 (21.9)	488 (37.3)																								
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)																									
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)																									
WEIGHT	Net 275 lbs. (125 kg.) Shipping 315 lbs. (143 kg.)																									
CONNECTIONS - ELECTRIC	Permanent Connection																									
- WATER SUPPLY	Inlet 1/2" FPT																									
- DRAIN	Outlet 3/4" FPT																									
	3/8" ID Pipe																									
CUBE CONTROL SYSTEM	Float Switch																									
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer																									
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe																									
COOLING WATER CONTROL	N/A																									
BIN CONTROL SYSTEM	Thermostat																									
COMPRESSOR	Hermetic, Model CS14K6E-TF5																									
CONDENSER	Air-cooled, Fin and Tube type																									
EVAPORATOR	Vertical type, Stainless Steel and Copper																									
REFRIGERANT CONTROL	Thermostatic Expansion Valve																									
REFRIGERANT CHARGE	R404A, 3 lbs. 14 oz. (1750 g.)																									
DESIGN PRESSURE	High 467 PSIG, Low 230 PSIG																									
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out; Low Voltage Cut-out (Internal)																									
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)																									
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch																									
LOW WATER PROTECTION	Float Switch																									
ACCESSORIES - SUPPLIED	N/A																									
- REQUIRED	Ice Storage Bin																									
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 253 V																								
	AMBIENT TEMP.	45 - 100° F																								
	WATER SUPPLY TEMP.	45 - 90° F																								
	WATER SUPPLY PRESS.	10 - 113 PSIG																								

We reserve the right to make changes in specifications and design without prior notice.

5. KM-1300SWF3 (Water-cooled)

AC SUPPLY VOLTAGE	208-230/60/3		
AMPERAGE	6.9 A (5 MIN. Freeze AT 104° F / WT 80° F)		
MINIMUM CIRCUIT AMPACITY	20A		
MAXIMUM FUSE SIZE	20A		
APPROX. ICE PRODUCTION	Ambient		
PER 24 HR.	Temp. (°F)		
lbs./day (kg./day)	50		
Reference without *marks	70		
	90		
	100		
SHAPE OF ICE	Crescent Cube		
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.		
APPROXIMATE STORAGE CAPACITY	N/A		
ELECTRIC & WATER CONSUMPTION	90° F / 70° F	70° F / 50° F	
ELECTRIC W (KWH/100 lbs.)	2125 (4.0)	2075 (3.8)	
WATER gal./24 HR. (gal./100 lbs.)	342 (27.7)	648 (49.8)	
WATER COOLED CONDENSER	1372 (112)	885 (68)	
gal./24 hr. (gal./100 lbs.)			
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)		
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)		
WEIGHT	Net 265 lbs. (120 kg.) Shipping 315 lbs. (143 kg.)		
CONNECTIONS - ELECTRIC	Permanent Connection		
- WATER SUPPLY	Inlet	1 ¹ / ₂ " FPT	Condenser Inlet 1 ¹ / ₂ " FPT
- DRAIN	Outlet	3 ¹ / ₄ " FPT	Condenser Outlet 3 ¹ / ₈ " FPT
		3 ¹ / ₈ " ID Pipe	
CUBE CONTROL SYSTEM	Float Switch		
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer		
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe		
COOLING WATER CONTROL	Water Regulator		
BIN CONTROL SYSTEM	Thermostat		
COMPRESSOR	Hermetic, Model CS14K6E-TF5		
CONDENSER	Water-cooled, Tube in Tube type		
EVAPORATOR	Vertical type, Stainless Steel and Copper		
REFRIGERANT CONTROL	Thermostatic Expansion Valve		
REFRIGERANT CHARGE	R404A, 2 lb. 2 oz. (950 g.)		
DESIGN PRESSURE	High 427 PSIG, Low 230 PSIG		
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out, Low Voltage Cut-out (Internal)		
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)		
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch		
LOW WATER PROTECTION	Float Switch		
ACCESSORIES - SUPPLIED	N/A		
- REQUIRED	Ice Storage Bin		
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 253 V	
	AMBIENT TEMP.	45 - 100° F	
	WATER SUPPLY TEMP.	45 - 90° F	
	WATER SUPPLY PRESS.	10 - 113 PSIG	

We reserve the right to make changes in specifications and design without prior notice.


6. KM-1300SRF3 (Remote air-cooled)

AC SUPPLY VOLTAGE	208-230/60/3																									
AMPERAGE	10.8 A (5 min. freeze AT 104° F / WT 80° F)																									
MINIMUM CIRCUIT AMPACITY	20A																									
MAXIMUM FUSE SIZE	20A																									
APPROX. ICE PRODUCTION REFERENCE PER 24 HR.	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temp. (°F)</th> <th colspan="3">Water Temp. (°F)</th> </tr> <tr> <th>50</th> <th>70</th> <th>90</th> </tr> </thead> <tbody> <tr> <td>70</td> <td>*1308 (593)</td> <td>1282 (581)</td> <td>1203 (546)</td> </tr> <tr> <td>80</td> <td>1288 (584)</td> <td>1247 (566)</td> <td>1145 (520)</td> </tr> <tr> <td>90</td> <td>1282 (581)</td> <td>*1218 (552)</td> <td>1125 (510)</td> </tr> <tr> <td>100</td> <td>1252 (568)</td> <td>1196 (543)</td> <td>*1039 (471)</td> </tr> </tbody> </table>			Ambient Temp. (°F)	Water Temp. (°F)			50	70	90	70	*1308 (593)	1282 (581)	1203 (546)	80	1288 (584)	1247 (566)	1145 (520)	90	1282 (581)	*1218 (552)	1125 (510)	100	1252 (568)	1196 (543)	*1039 (471)
Ambient Temp. (°F)	Water Temp. (°F)																									
	50	70	90																							
70	*1308 (593)	1282 (581)	1203 (546)																							
80	1288 (584)	1247 (566)	1145 (520)																							
90	1282 (581)	*1218 (552)	1125 (510)																							
100	1252 (568)	1196 (543)	*1039 (471)																							
lbs./day (kg./day)	Reference without *marks																									
SHAPE OF ICE	Crescent Cube																									
ICE PRODUCTION PER CYCLE	30.1 lbs. (13.7 kg.) 1440 pcs.																									
APPROXIMATE STORAGE CAPACITY	N/A																									
ELECTRIC & WATER CONSUMPTION	90°F/70°F	70°F/50°F																								
ELECTRIC W (KWH/100 lbs.)	2300 (4.53)	2270 (4.17)																								
WATER gal./24 HR. (gal./100 lbs.)	252 (20.7)	463 (35.4)																								
EXTERIOR DIMENSIONS (WxDxH)	48" x 27 ³ / ₈ " x 27 ³ / ₈ " (1219 x 695 x 695 mm.)																									
EXTERIOR FINISH	Stainless steel, Galvanized Steel (Rear)																									
WEIGHT	Net 255 lbs. (116 kg.) Shipping 315 lbs. (143 kg.)																									
CONNECTIONS - ELECTRIC	Permanent Connection																									
- WATER SUPPLY	Inlet 1 ¹ / ₂ " FPT																									
- DRAIN	Outlet 3 ¹ / ₄ " FPT 3 ¹ / ₈ " ID Pipe																									
CUBE CONTROL SYSTEM	Float Switch																									
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer																									
ICE MAKING WATER CONTROL	Timer Controlled, Overflow Pipe																									
COOLING WATER CONTROL	N/A																									
BIN CONTROL SYSTEM	Thermostat																									
COMPRESSOR	Hermetic, Model CS14K6E-TF5																									
CONDENSER	Air-cooled remote, Condenser Unit URC-12F recommended																									
EVAPORATOR	Vertical type, Stainless Steel and Copper																									
REFRIGERANT CONTROL	Thermostatic Expansion Valve, Condensing Pressure Regulator on URC-12F																									
REFRIGERANT CHARGE	R404A, 11 lbs. 7 oz. (5200 g.) (Ice maker 7 lbs.; Cond. unit 4 lbs. 7 oz.)																									
DESIGN PRESSURE	HIGH 467 PSIG, LOW 230 PSIG																									
P.C. BOARD CIRCUIT PROTECTION	High Voltage Cut-out (Internal)																									
COMPRESSOR PROTECTION	Auto-reset Overload Protector (Internal)																									
REFRIGERANT CIRCUIT PROTECTION	Auto-reset High Pressure Control Switch																									
LOW WATER PROTECTION	Float Switch																									
ACCESSORIES - SUPPLIED	N/A																									
- REQUIRED	Ice Storage Bin, Remote Condenser Unit																									
OPERATION CONDITIONS	VOLTAGE RANGE	187 - 264 V																								
	AMBIENT TEMP.	45 - 100° F																								
	WATER SUPPLY TEMP.	45 - 90° F																								
	WATER SUPPLY PRESS.	10 - 113 PSIG																								

We reserve the right to make changes in specifications and design without prior notice.

7. CONDENSING UNIT

URC-12F

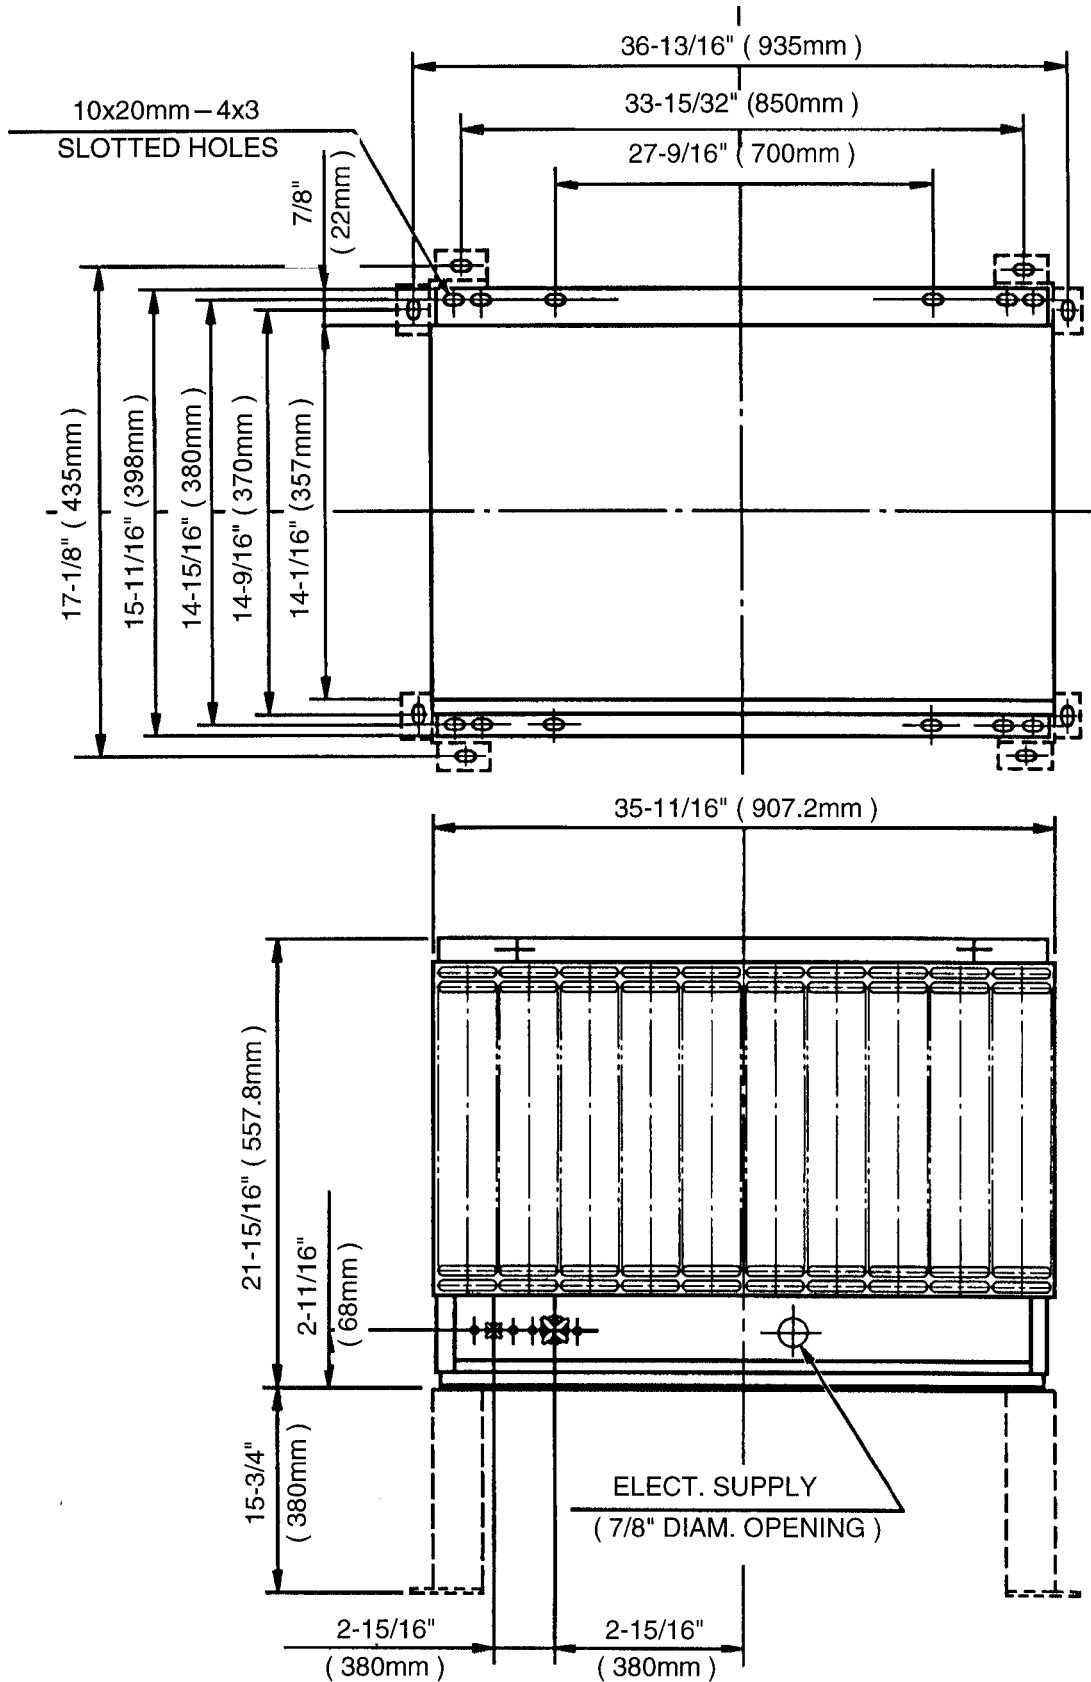


SPECIFICATIONS

MODEL: URC-12F	
EXTERIOR	Galvanized Steel
DIMENSIONS (W x D x H)	35 - 11/16" x 15-11/16" x 21-15/16" (907.2 x 398 x 557.8 mm)
REFRIGERANT CHARGE	
URC-12F	R404A 4 lbs. 7 oz. (2000 g)
WEIGHT	Net 80 lbs. (36 kg) Shipping 87 lbs. (39 kg)
CONNECTIONS	
REFRIGERANT	One Shot Couplings (Aeroquip)
ELECTRICAL	Permanent Connection
CONDENSER	Air-cooled
HEAD PRESSURE CONTROL	Condensing Pressure Regulator
AMBIENT CONDITION	Min. -20°F - Max. +122°F (-29°C to +50°C) Outdoor use


II. GENERAL INFORMATION

1. CONSTRUCTION


[a] KM-1300SAF/3

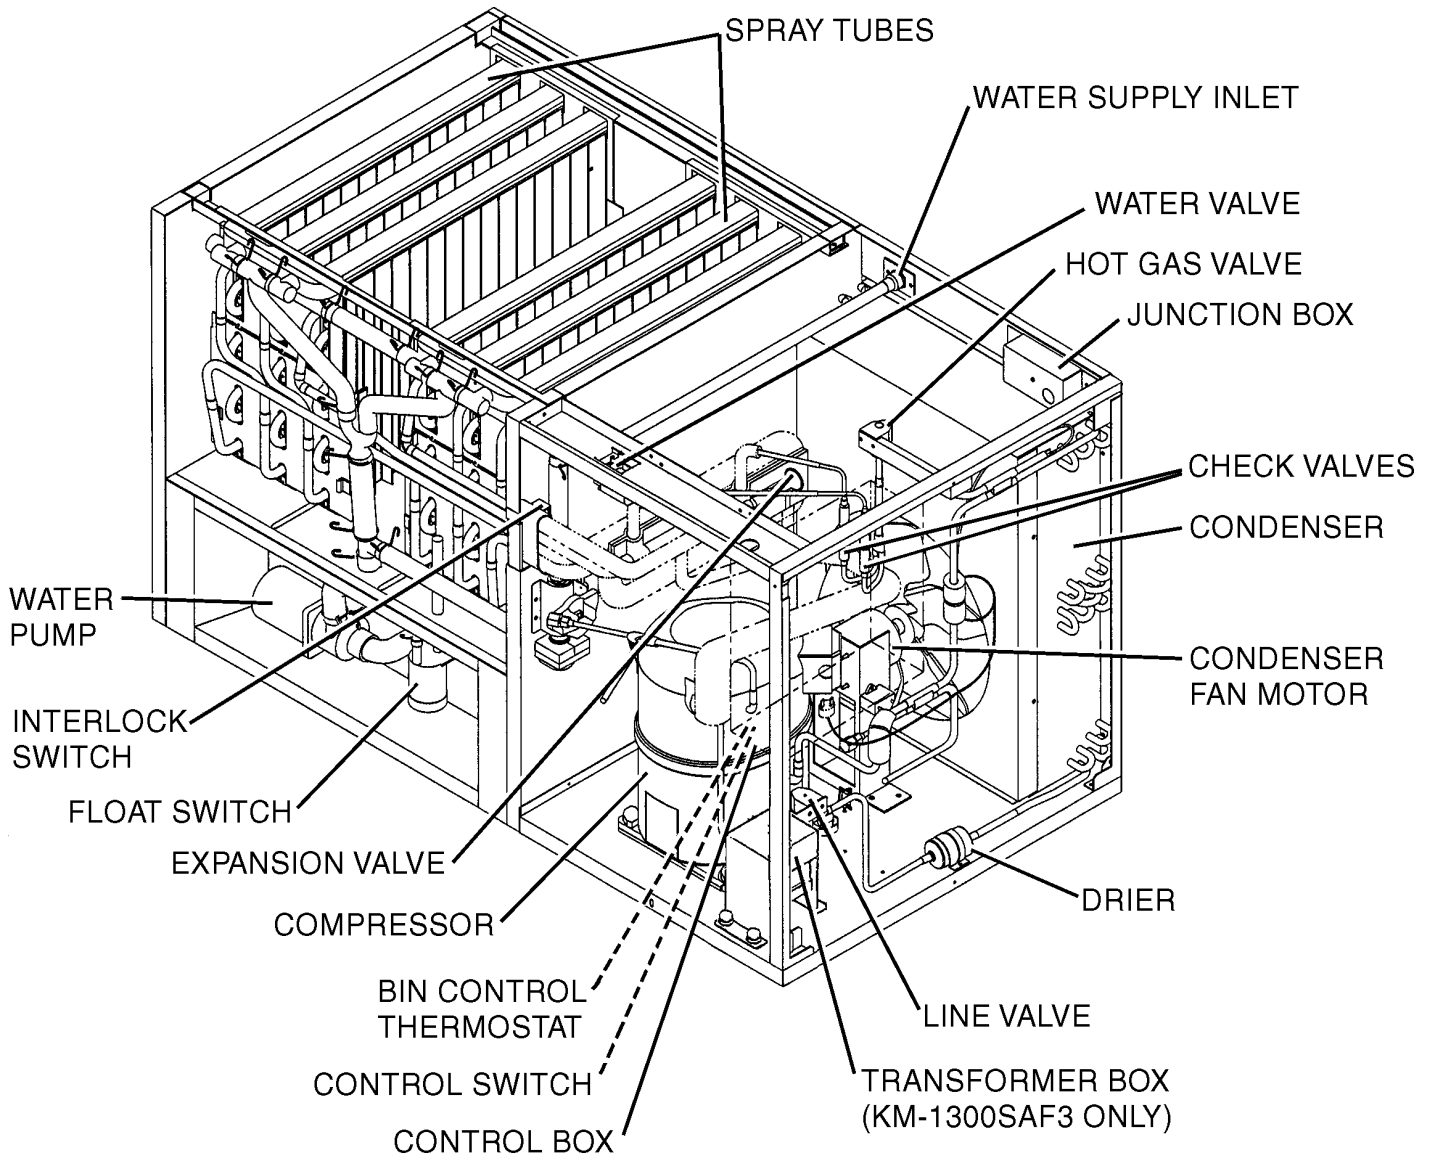

[b] KM-1300SWF/3

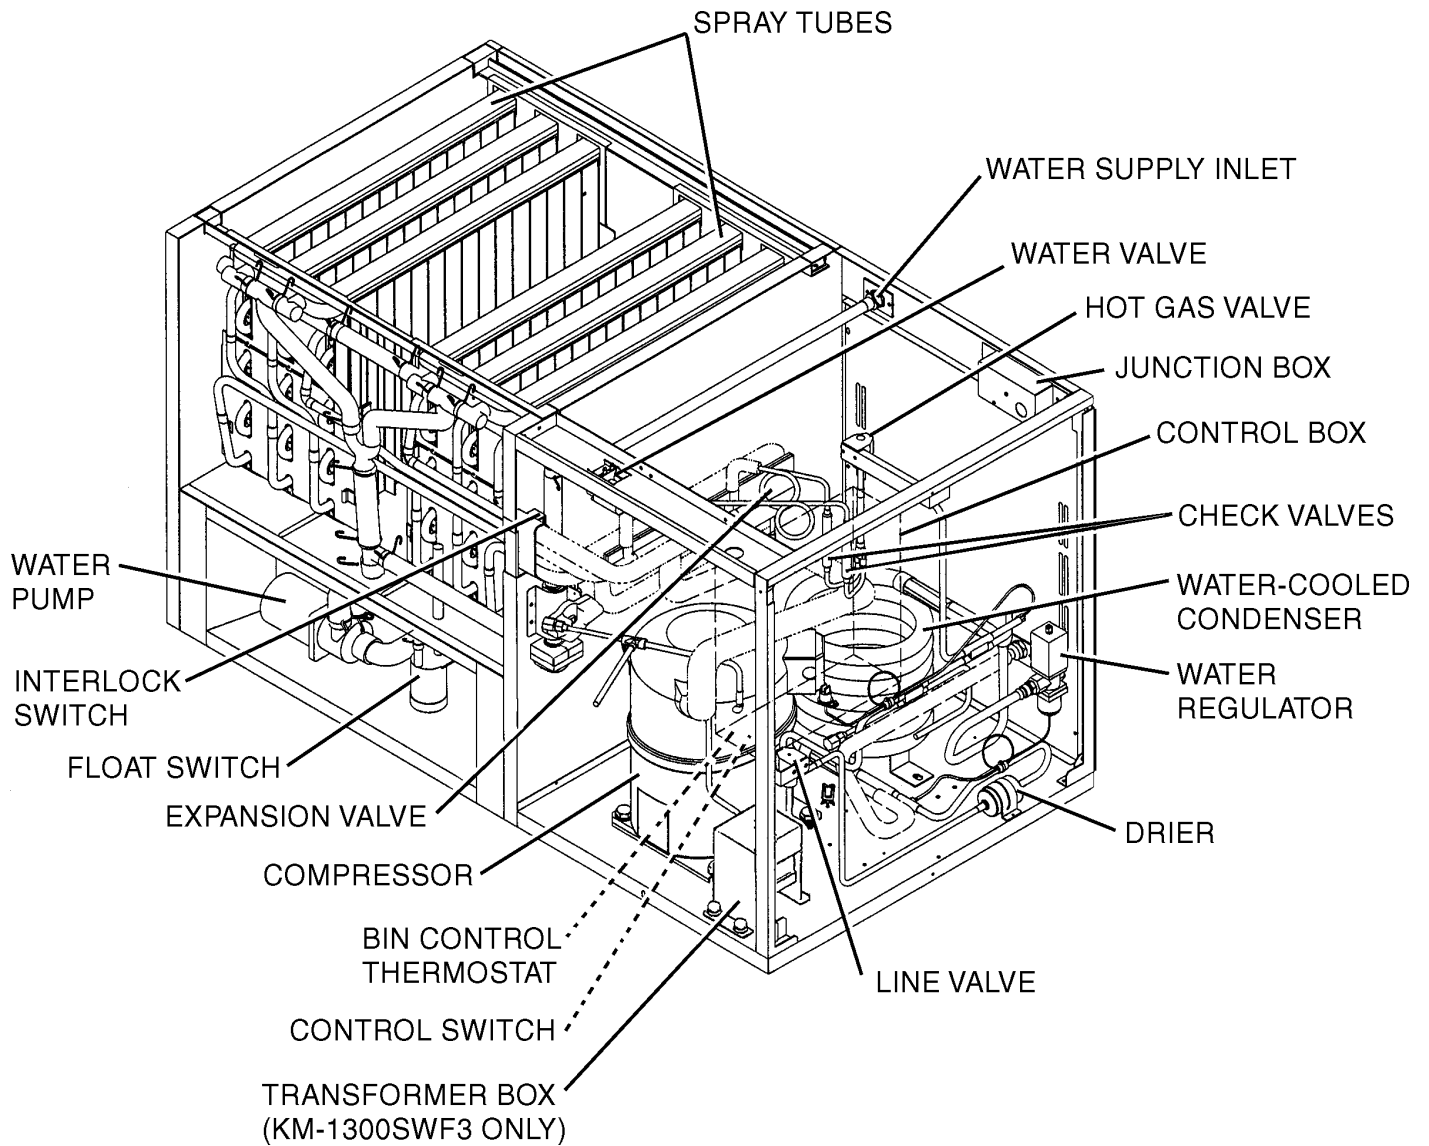

[c] KM-1300SRF/3

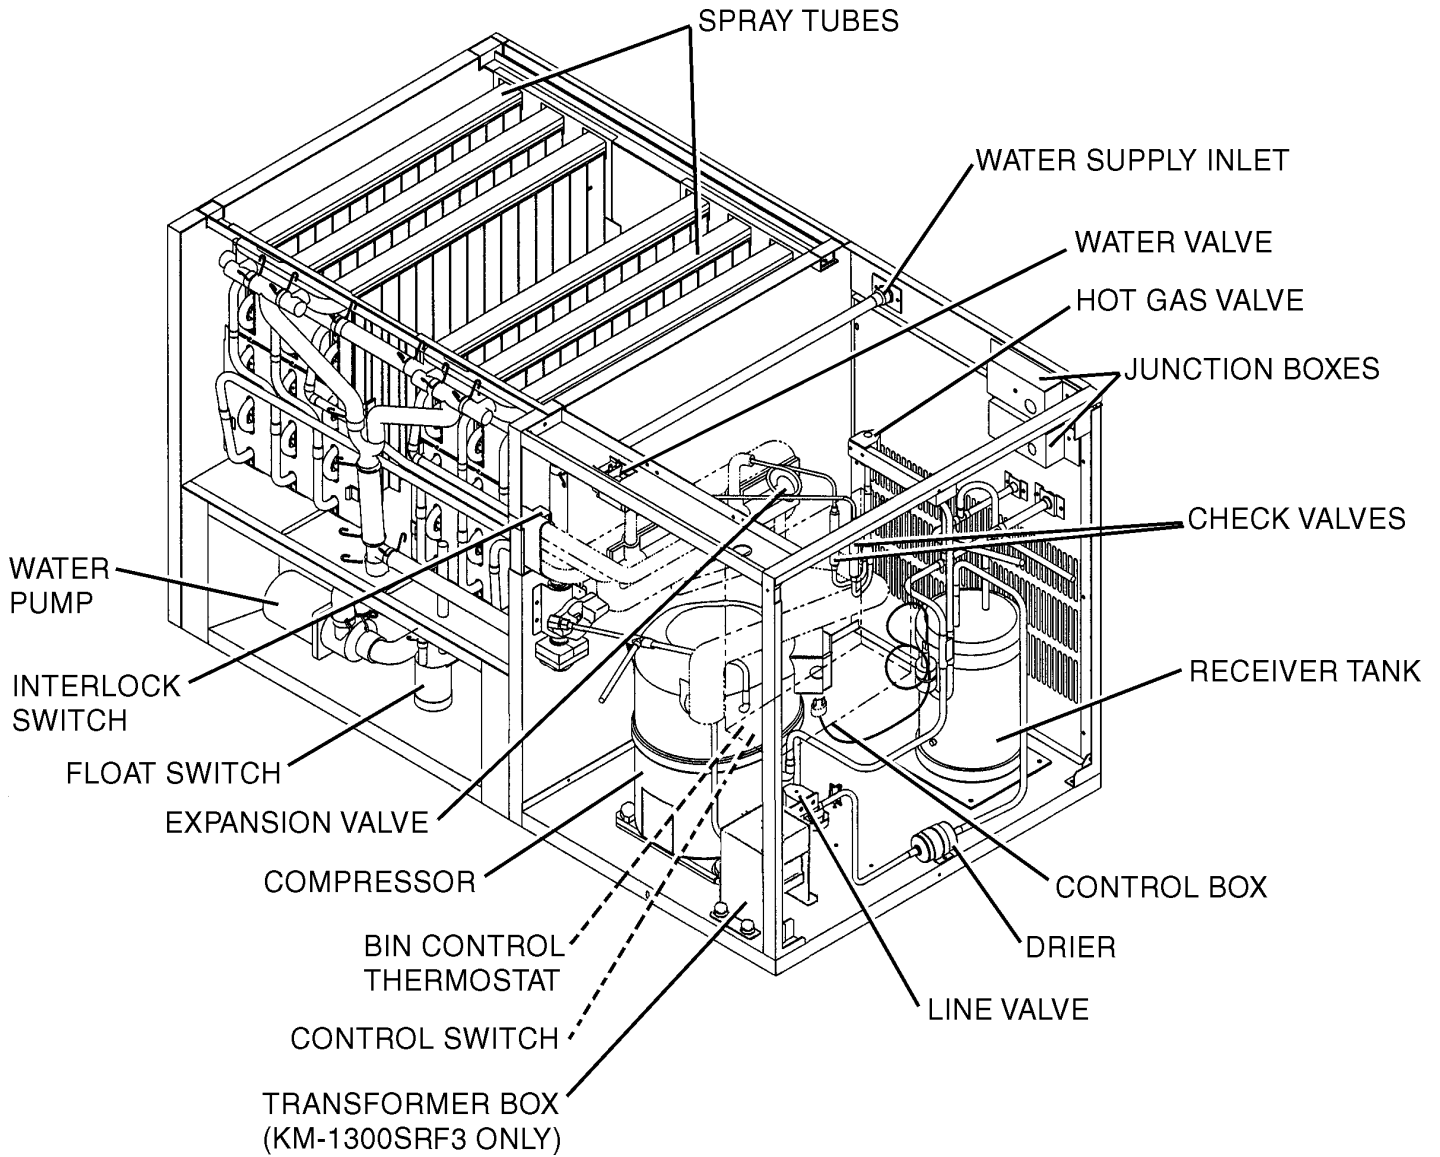

2. CONTROLLER BOARD

[a] SOLID-STATE CONTROL

- 1) A HOSHIZAKI exclusive solid-state control is employed in KM-1300SAF, KM-1300SWF, KM-1300SRF, KM-1300SAF3, KM-1300SWF3 and KM-1300SRF3 Stackable Crescent Cubers.
- 2) A Printed Circuit Board (hereafter called "Controller Board") includes a stable and high quality control system.
- 3) All models are pretested and factory-adjusted.

[b] CONTROLLER BOARD

CAUTION

1. Fragile, handle very carefully.
2. A controller board contains integrated circuits, which are susceptible to failure due to static discharge. It is especially important to touch the metal part of the unit when handling or replacing the board.
3. Do not touch the electronic devices on the board or the back of the board to prevent damage to the board.
4. Do not change wiring and connections. Especially, never misconnect K3, K4 and K5, because the same connector is used for the Thermistor and Float Switch. K4 is not connected.
5. Do not fix the electronic devices or parts on the board in the field. Always replace the whole board assembly when it goes bad.
6. Do not short out power supply to test for voltage.

KM-1300S_F/3 models use either the Alpine Controller Board (orange):

PART NUMBER	TYPE
2U0127-01	MY9KM910 (Alpine) MY9KM91B (Alpine)

OR the Control Products Board (green):

PART NUMBER	TYPE
2A0836-01	HOSHIZAKI 001 (Control Products - 8 Pin)

OR the Control Products Improved "E" Board (green):

PART NUMBER	TYPE
2A1410-01	HOS-001A (Control Products - 10 Pin)

Features of All Three Controller Boards

(1) Maximum Water Supply Period - 6 minutes

Water Solenoid Valve opening, in the Defrost (Harvest) Cycle, is limited by maximum period of the defrost timer. The Water Valve cannot remain open longer than the maximum period. The Water Valve can close in less than the maximum period if the defrost cycle is completed.

(2) Defrost Timer

The defrost cycle starts when the Float Switch opens and completes the freeze cycle. But the Defrost Timer does not start counting until the Thermistor senses 48°F at the Evaporator outlet. The period from the end of the freeze cycle up to the point of the Thermistor's sensing varies depending on the ambient and water temperatures.

(3) High Temperature Safety - 127 ± 7°F

The temperature of the suction line in the refrigerant circuit is limited by the High Temperature Safety. During the defrost cycle the Evaporator temperature rises. The Thermistor senses 48°F and starts the Defrost Timer. After the Defrost Timer counts down to zero, the normal freeze cycle begins. If the Evaporator temperature continues to rise, the Thermistor will sense the rise in temperature and at 127 ± 7°F the Thermistor operates the High Temperature Safety.

This High Temperature Safety shuts down the circuit and the icemaker automatically stops. To reset the safety, turn the power off and back on again. This High Temperature Safety protects the unit from excessive temperature.

(4) Low Water Safety

If the Pump Motor is operated without water, the mechanical seal can fail. To prevent this type of failure, the Controller Board checks the position of the Float Switch at the end of the initial one minute water fill cycle and at the end of each defrost cycle.

If the Float Switch is in the up position (electrical circuit closed), the Controller Board changes to the ice making cycle. If the Float Switch is in the down position (electrical circuit open), the Controller Board changes to a one minute water fill cycle before starting the ice making cycle. This method allows for a Low Water Safety shut down to protect the Water Pump from mechanical seal failure.

For water-cooled model, if the water is shut off, the unit is protected by the High Pressure Switch.

(5) High Voltage Cut-out

The maximum allowable supply voltage of this icemaker is limited by the High Voltage Cut-out.

If miswiring causes excessive voltage on the Controller Board, the High Voltage Cut-out shuts down the circuit in 3 seconds and the icemaker automatically stops. When the proper supply voltage is resumed, the icemaker automatically starts running again.

Connector K1
Pins #1 through #10


- #1, 9 Magnetic Contactor
- #2 Hot Gas Valve
- #3 Line Valve
- #4 Pump Motor (icemaking)
- #5 Pump Motor (drain)
- #6 Water Valve
- #7, 10 Power (line, Bin Control)
- #8 Open

Dip Switch
Defrost Timer, Drain Timer
& Drain Counter

Connector K5
Float Switch

Connector K4
Open
(not connected)

Connector K3
Defrost Control
(Thermistor)

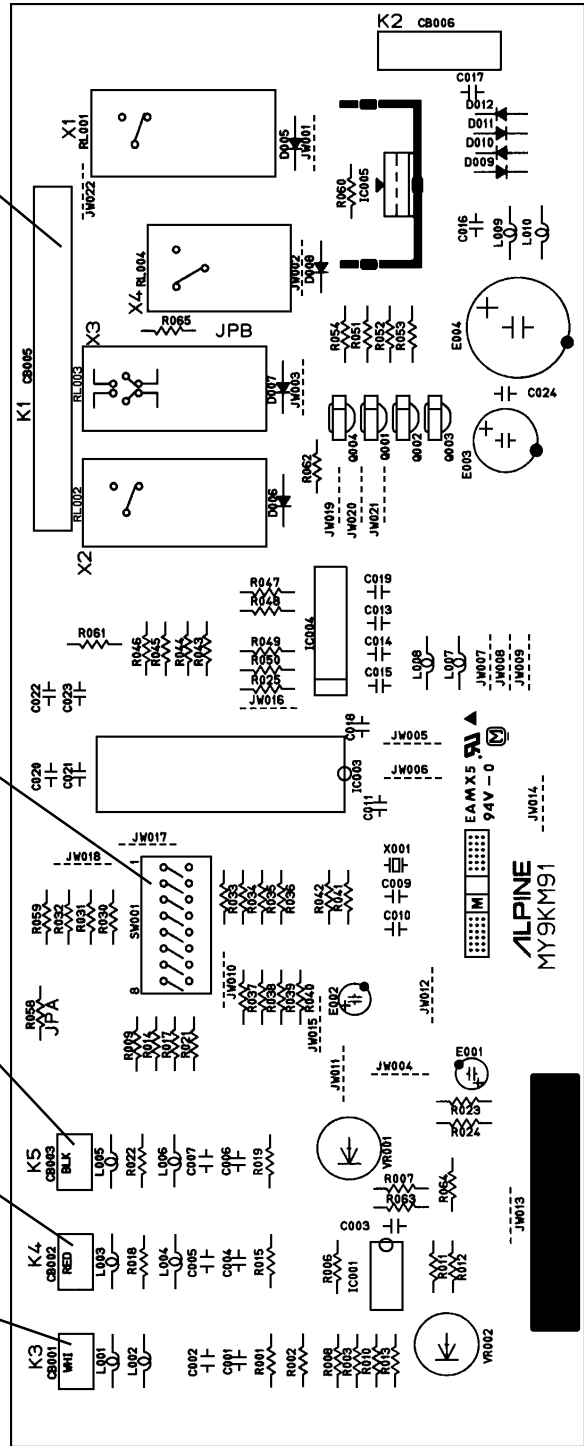

(Alpine "C"/Alpine Board)

Features of Control Products “E” Controller Board

The “E” board includes LED lights and audible alarm safeties. The red LED indicates proper control voltage and will remain on unless a control voltage problem occurs. At startup a 5 second delay occurs while the board conducts an internal timer check. A short beep occurs when the power switch is turned ON or OFF.

The green LED’s 1-4 represent the corresponding relays and energize and sequence 5 seconds from initial startup as follows:

Sequence Step	LED’s on	Length: Min.	Max.	Avg.
1 Minute Fill Cycle	LED4			60 sec.
Harvest Cycle	LED1, 4, & 2	2 min.	20 min.	3-5 min.
Freeze Cycle	LED1	5 min.	60 min.	30-35 min.
Reverse Pump Out	LED1, 3, & 2	10 sec.	20 sec.	Factory set.

{LED 1 – Comp; LED 2 - HGV/CFM; LED 3 – PM; LED 4 - WV}

The built in safeties shut down the unit and have alarms as follows:

1 beep every 3 sec. = **High Evaporator Temperature** >127 ° F.

Check for defrost problem (stuck HGV or relay), hot water entering unit, stuck headmaster, or shorted thermistor.

2 beeps every 3 sec. = **Defrost Back Up Timer**. Defrost >20 minutes.

Orange LED marked 20 MIN energizes.

Check for open thermistor, HGV not opening, TXV leaking by, low charge, or inefficient compressor.

3 beeps every 3 sec. = **Freeze Back Up Timer**. Freeze > 60 minutes.

Yellow LED marked 60 MIN energizes.

Check for F/S stuck closed (up), WV leaking by, HGV leaking by, TXV not feeding properly, low charge, or inefficient compressor.

To manually reset the above safeties, depress white alarm reset button with the power supply ON.

6 beeps every 3 sec. = **Low Voltage**. Voltage is 92 Vac or less.

7 beeps every 3 sec. = **High Voltage**. Control voltage > 147Vac ±5%.


The red LED will de-energize if voltage protection operates.

The voltage safety automatically resets when voltage is corrected.

The **Output Test** switch “S3” provides a relay sequence test. With power OFF, place S3 on and switch power to ICE. The correct lighting sequence should be none, 2, 3, 4, 1, & 4, normal sequence every 5 seconds. S3 should remain in the “OFF” position for normal operation.

The application switch located between relay X3 & X4 must be set to match the original board application. Place this switch in the ALP position if there is no white wire supplied to the K1 connector. If there is a white wire, place the switch in the C position. If this switch is placed in the wrong position either the compressor contactor will remain energized with the control switch OFF or the unit will not start.


The dip switches should be adjusted per the adjustment chart published in the Tech Specs book. 7 & 8 must remain in the OFF position.

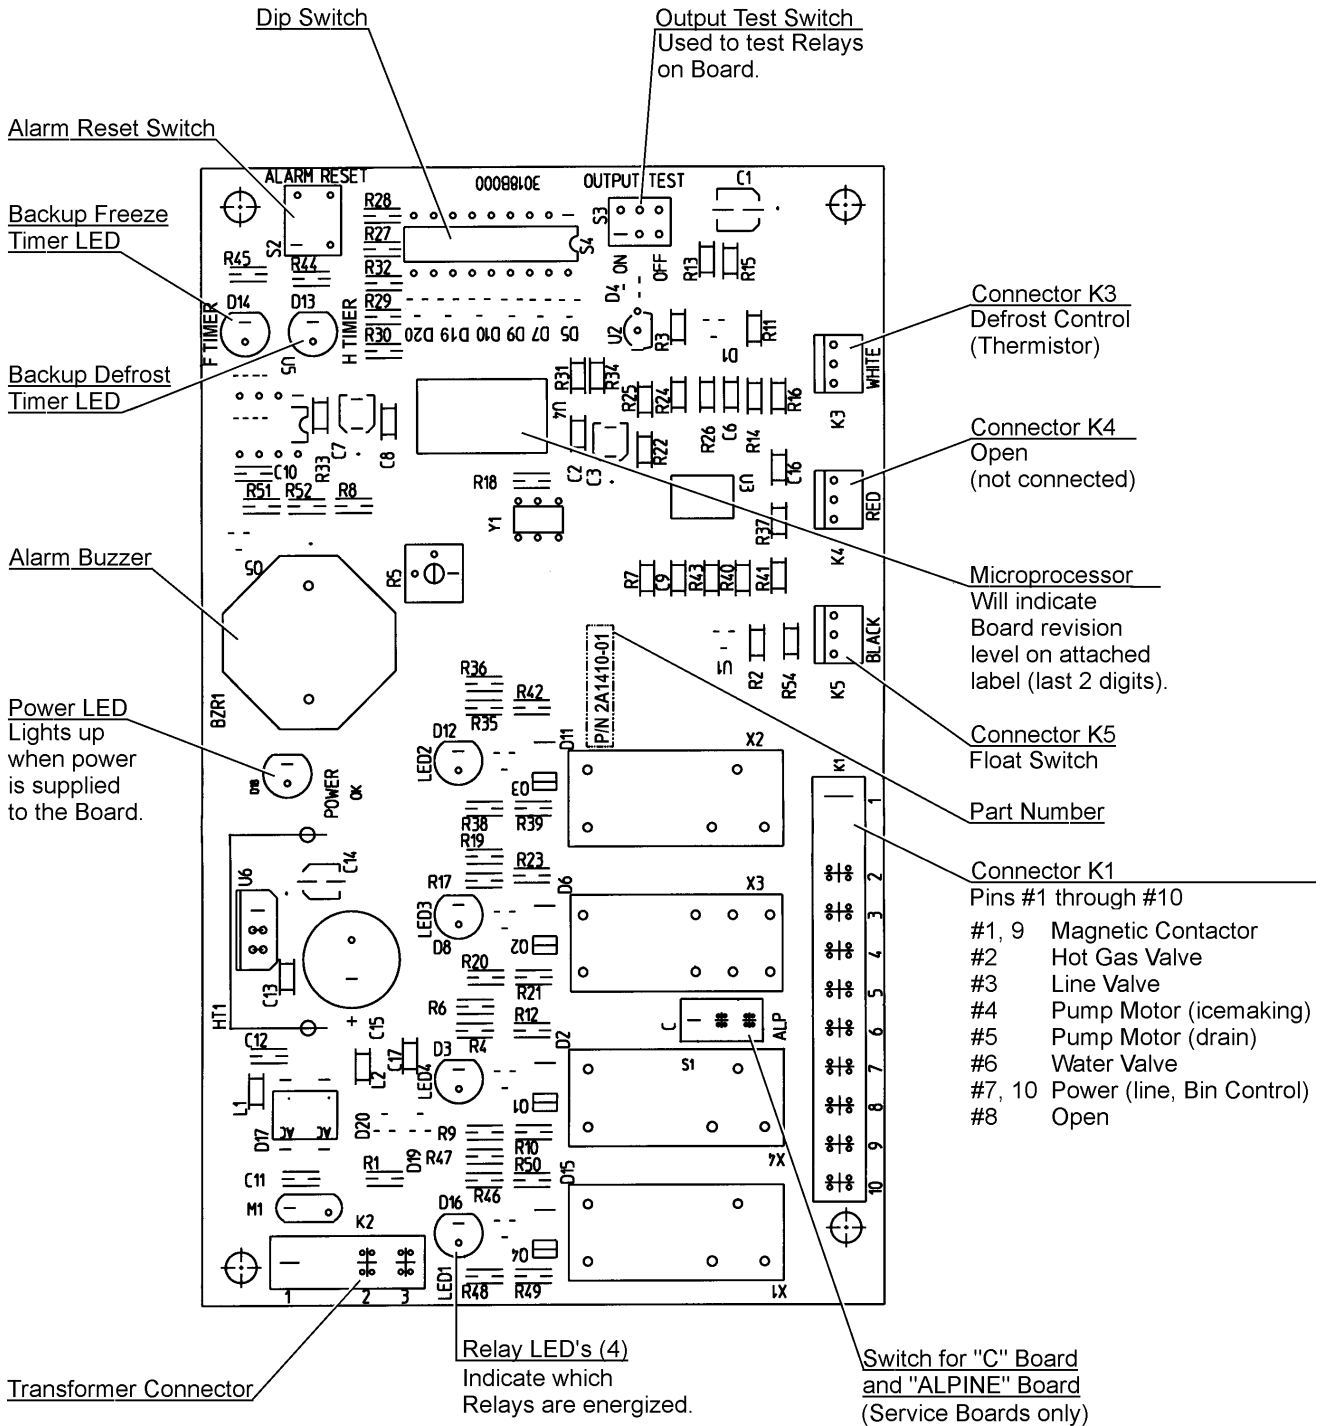

(Control Products HOS-001A Board)

[c] SEQUENCE

1st Cycle [KM-1300SAF/3, KM-1300SWF/3 and KM-1300SRF/3]

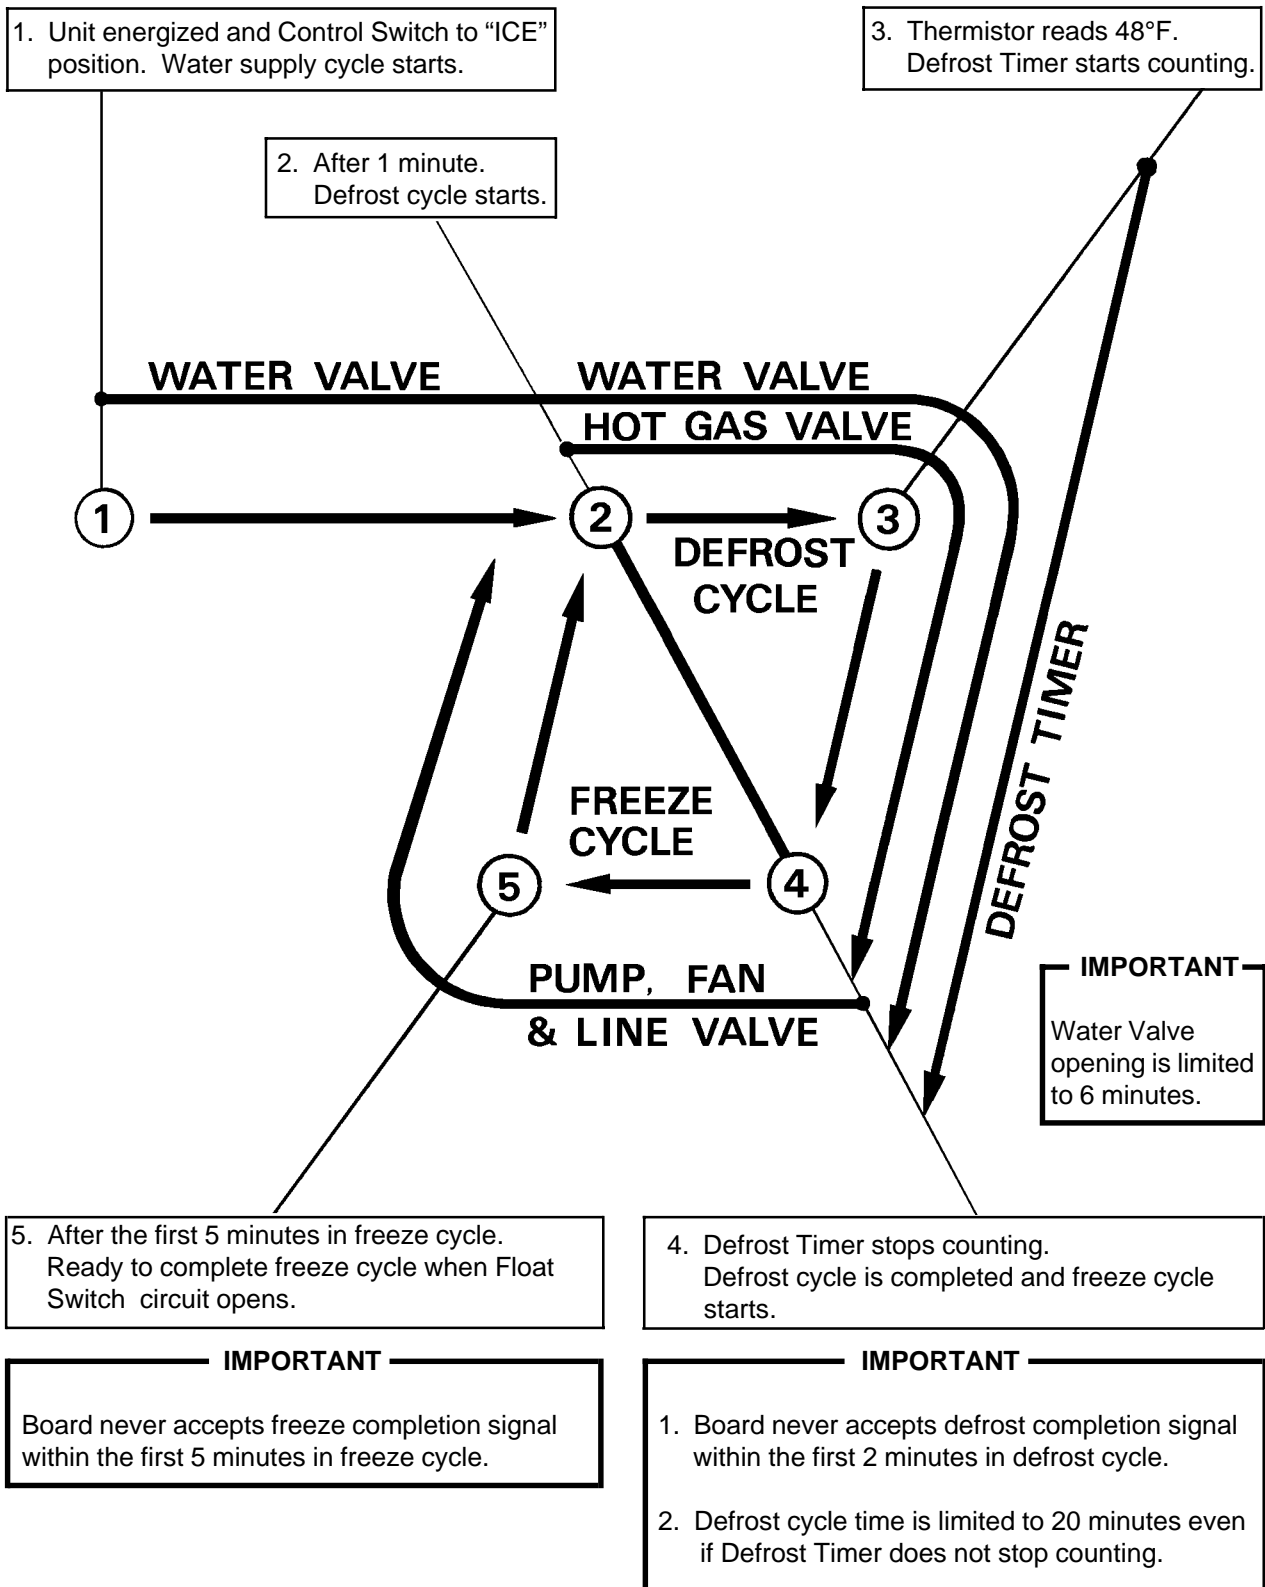


2nd Cycle and after with pump drain
[KM-1300SAF/3, KM-1300SWF/3 and KM-1300SRF/3]

IMPORTANT
 Freeze cycle time is limited to 60 minutes even if Float Switch does not open.

1. Float Switch opens and signals to complete freeze cycle.
 Drain timer starts counting.

2. Drain timer stops counting.
 Pump drain is completed

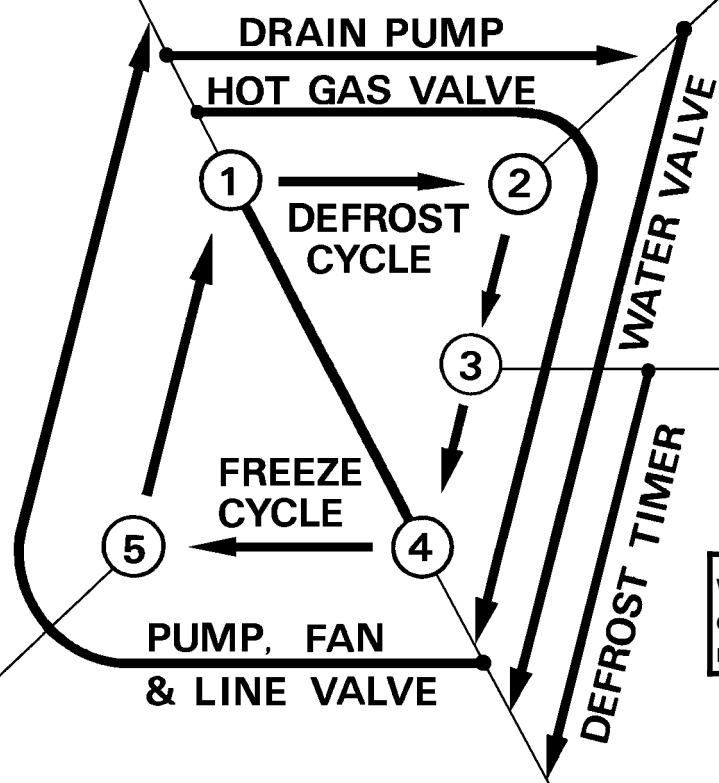

3. Thermistor reads 48° F.
 Defrost Timer starts counting.

IMPORTANT
 Water Valve opening is limited to 6 minutes.

5. After the first 5 minutes in freeze cycle.
 Ready to complete freeze cycle when Float Switch circuit opens.

4. Defrost Timer stops counting.
 Defrost cycle is completed and freeze cycle starts.

IMPORTANT
 Board never accepts freeze completion signal within the first 5 minutes in freeze cycle.

IMPORTANT
 1. Board never accepts defrost completion signal within the first 2 minutes in defrost cycle.
 2. Defrost cycle time is limited to 20 minutes even if Defrost Timer does not stop counting.


2nd Cycle and after with no pump drain
[KM-1300SAF/3, KM-1300SWF/3 and KM-1300SRF/3]

IMPORTANT

Freeze cycle time is limited to 60 minutes even if Float Switch does not open.

1. Float Switch opens and signals to complete freeze cycle.

2. Thermistor reads 48° F. Defrost Timer starts counting.

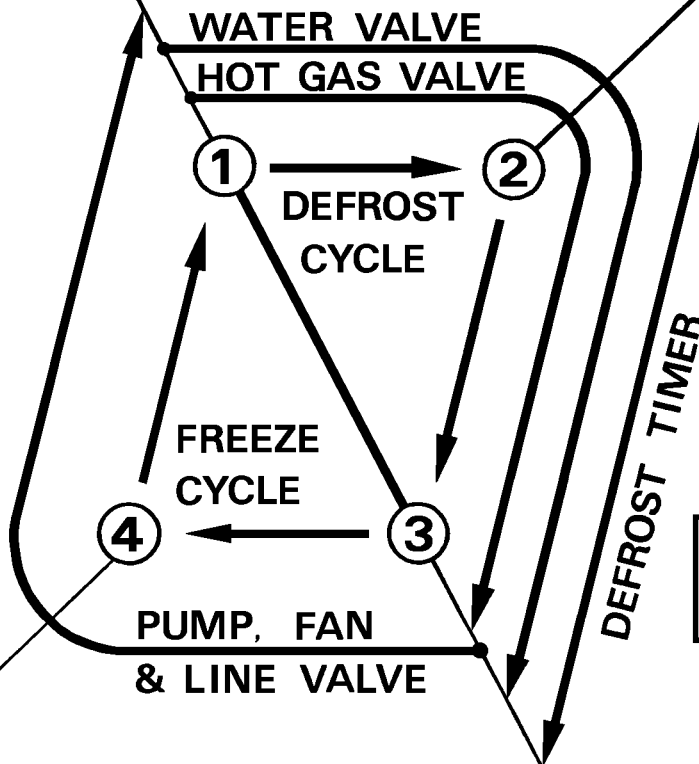

IMPORTANT

Water Valve opening is limited to 6 minutes.

4. After the first 5 minutes in freeze cycle. Ready to complete freeze cycle when Float Switch circuit opens.

3. Defrost Timer stops counting. Defrost cycle is completed and freeze cycle starts.

IMPORTANT

Board never accepts freeze completion signal within the first 5 minutes in freeze cycle.

IMPORTANT

1. Board never accepts defrost completion signal within the first 2 minutes in defrost cycle.
2. Defrost cycle time is limited to 20 minutes even if Defrost Timer does not stop counting.

[d] CONTROLS AND ADJUSTMENTS

The Dip Switch is factory-adjusted to the following positions:

DIP SWITCH NO.		1	2	3	4	5	6	7	8	9	10
2U0127-01	KM-1300S_F/3	OFF	OFF	ON	ON	ON	ON	OFF	OFF	NA	NA
2A0836-01											
2A1410-01	KM-1300S_F,	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
	KM-1300SWF3										
	KM-1300SAF3 KM-1300SRF3	OFF	OFF	ON	ON	ON	ON	OFF	OFF	ON	OFF

Switch Nos. 1 and 2:

Used for adjustment of the Defrost Timer.

The Defrost Timer starts counting when the Thermistor reads a certain temperature at the Evaporator outlet.

Switch Nos. 3 and 4:

Used for adjustment of the Drain Timer.

When a freeze cycle is completed, the Pump Motor stops, and the icemaker resumes operation in 2 seconds. Then the Pump Motor drains the Water Tank for the time determined by the Drain Timer. The Drain Timer also determines the time to restrain completion of a defrost cycle, i.e. the minimum defrost time.


Switch Nos. 5 and 6:

Used for adjustment of the Drain Counter.

The Pump Motor drains the Water Tank at the frequency determined by the Drain Counter.

Switch Nos. 7 and 8:

Used only for checking the Controller Board. Usually set in OFF position.

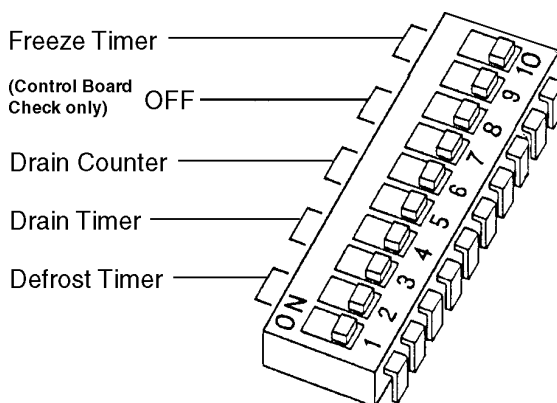

Switch Nos. 9 and 10:

Used for adjustment of Freeze Timer.

The Freeze Timer determines maximum freeze cycle time. Upon termination of Freeze Timer, machine initiates the harvest cycle. After 2 consecutive timer terminations, machine will shut down, possibly indicating a problem.

1) Defrost Control

A thermistor (Semiconductor) is used for a defrost control sensor. The resistance varies depending on the Suction Line temperatures. The Thermistor detects the temperature of the Evaporator outlet to start the Defrost Timer. No adjustment is required. If necessary, check for resistance between Thermistor leads, and visually check the Thermistor mounting, located on the Suction Line next to the Evaporator outlet.

Temperature (°F)	Resistance (kΩ)
0	14.401
10	10.613
32	6.000
50	3.871
70	2.474
90	1.633

Check a thermistor for resistance by using the following procedures.

- (i) Disconnect the connector K3 on the board.
- (ii) Remove the Thermistor. See “V. 11. REMOVAL AND REPLACEMENT OF THERMISTOR.”
- (iii) Immerse the Thermistor sensor portion in a glass containing ice and water for 2 or 3 minutes.
- (iv) Check for a resistance between Thermistor leads.
Normal reading is within 3.5 to 7 kΩ. Replace the Thermistor if it exceeds the normal reading.

2) Defrost Timer

No adjustment is required under normal use, as the Defrost Timer is adjusted to the suitable position. However, if necessary when all the ice formed on the Evaporator does not fall into the bin in the harvest cycle, adjust the Defrost Timer to a longer setting by adjusting the Dip Switch (No. 1 & 2) on the Controller Board.

SETTING		TIME
Dip Switch No. 1	Dip Switch No. 2	
OFF	OFF	60 seconds
ON	OFF	90 seconds
OFF	ON	120 seconds
ON	ON	180 seconds

3) Drain Timer

The Drain Timer is factory-adjusted, and no adjustment is required.

SETTING		TIME	
Dip Switch No. 3	Dip Switch No. 4	T1	T2
OFF	OFF	10 seconds	150 seconds
ON	OFF	10 seconds	180 seconds
OFF	ON	10 seconds	120 seconds
ON	ON	20 seconds	180 seconds

T1: Time to drain the Water Tank

T2: Time to restrain defrost completion

4) Drain Counter

CAUTION

Do not adjust the Drain Counter, or the Evaporator may freeze up.

The Drain Counter is factory-adjusted to drain the Water Tank every 10 cycles, and no adjustment is required. However, where water quality is bad and the icemaker needs a pump drain more often, the Drain Counter can be adjusted as shown in the table below:

SETTING		FREQUENCY
Dip Switch No. 5	Dip Switch No. 6	
OFF	OFF	every cycle
ON	OFF	every 2 cycles
OFF	ON	every 5 cycles
ON	ON	every 10 cycles

5) Freeze Timer

CAUTION

Adjust to proper specification, or the unit may not operate correctly.

Two new dip switches numbered 9 and 10 have been added to the improved "E" board to better prevent possible freeze ups. These settings come factory set to the default setting of 60 min. (OFF, OFF). Check the adjustment chart published in the Tech Specs for proper settings. If the old board does not have these two dip switches, (only 8 instead of 10), leave setting as OFF, OFF.

SETTING		TIME
Dip Switch No. 9	Dip Switch No. 10	
OFF	OFF	60 min.
ON	OFF	70 min.
OFF	ON	50 min.
ON	ON	60 min.

6) Bin Control

CAUTION

When the ambient temperature is below 45°F, the Bin Control Thermostat operates to stop the icemaker even if the Ice Storage Bin is empty. When the Thermostat is set in the prohibited range, the icemaker operates continuously even if the Ice Storage Bin is filled with ice. Setting in the prohibited range might cause severe damage to the icemaker resulting in failure.

No adjustment is required under normal use, as the Bin Control is factory-adjusted. Adjust it, if necessary, so that the icemaker stops automatically within 10 seconds after ice contacts the Bin Control Thermostat Bulb.

[e] CHECKING THE CONTROLLER BOARD

- 1) Visually check the sequence with the icemaker operating.
- 2) Visually check the Controller Board by using the following procedures.
 - (i) Adjust the Defrost Timer to minimum position.
Disconnect the Thermistor from the Controller Board.
Connect a 1.5 kΩ - 3.5 kΩ resistor to the Connector K3 (pins #1 and #2), and energize the unit.

After the 1 minute \pm 5 second water supply cycle and the 2 minute \pm 10 second defrost cycle, the unit should start the freeze cycle.

- (ii) After the above step (i), disconnect the Float Switch leads from the Controller Board within the first 5 minutes of the freeze cycle.

The unit should go into the defrost cycle after the first 5 minutes \pm 20 seconds of the freeze cycle.

- (iii) Reconnect the Float Switch Connector to the Controller Board. After the first 5 minutes of the freeze cycle, disconnect the Float Switch leads from the Controller Board.

At this point, the unit should start the defrost cycle.

- (iv) After Step (iii), de-energize the unit and confirm that the Defrost Timer is in the minimum position. Disconnect the resistor from the Controller Board, and energize the unit.

After the 1 minute water supply cycle, the defrost cycle starts.

Re-connect a 1.5 k Ω - 3.5 k Ω resistor to the Connector K3 (pins #1 and #2) after the first 2 minutes of the defrost cycle. The unit should start the freeze cycle after 1 minute \pm 5 seconds from the resistor connection.

[ALPINE BOARD ONLY]


3) Check the Controller Board by using test program of the Alpine Controller Board (next page).

- (i) Disconnect the Connector K1 from the Controller Board. Set the Dip Switch No. 7 and 8 on the Controller Board to the "ON" position, and energize the unit.
- (ii) The current flows to each Relay (from X1 to X4) one after another every time the float is raised and the contacts close. See the following chart, and check "OPEN" and "CLOSE" of Pins of the Connector K1 at each step.
- (iii) If the checks are completed, turn off the icemaker, plug the Connector K1 into the Controller Board as before, and set the Dip Switch No. 7 and 8 to the "OFF" position.

[CONTROL PRODUCTS BOARD ONLY]

The Output Test Switch "S3" provides a relay sequence test. With power OFF, place S3 on and switch power to ICE. The correct lighting sequence should be none, 2, 3, 4, 1, and 4, normal sequence every 5 seconds. S3 should remain in the "OFF" position for normal operation.


• TEST PROGRAM OF ALPINE CONTROLLER BOARD

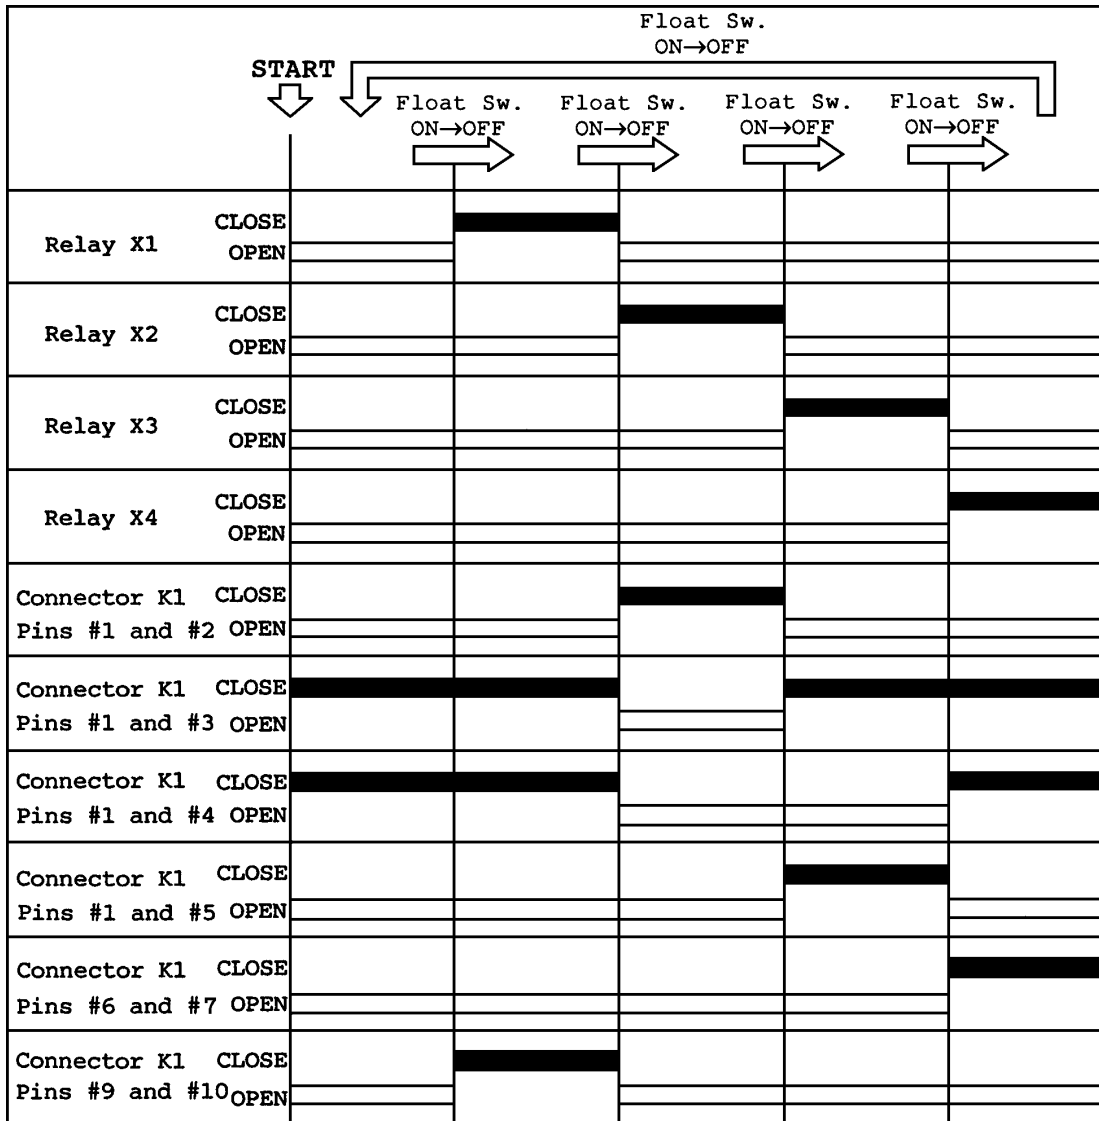


III. TECHNICAL INFORMATION

1. WATER CIRCUIT AND REFRIGERANT CIRCUIT


[a] KM-1300SAF, KM-1300SAF3

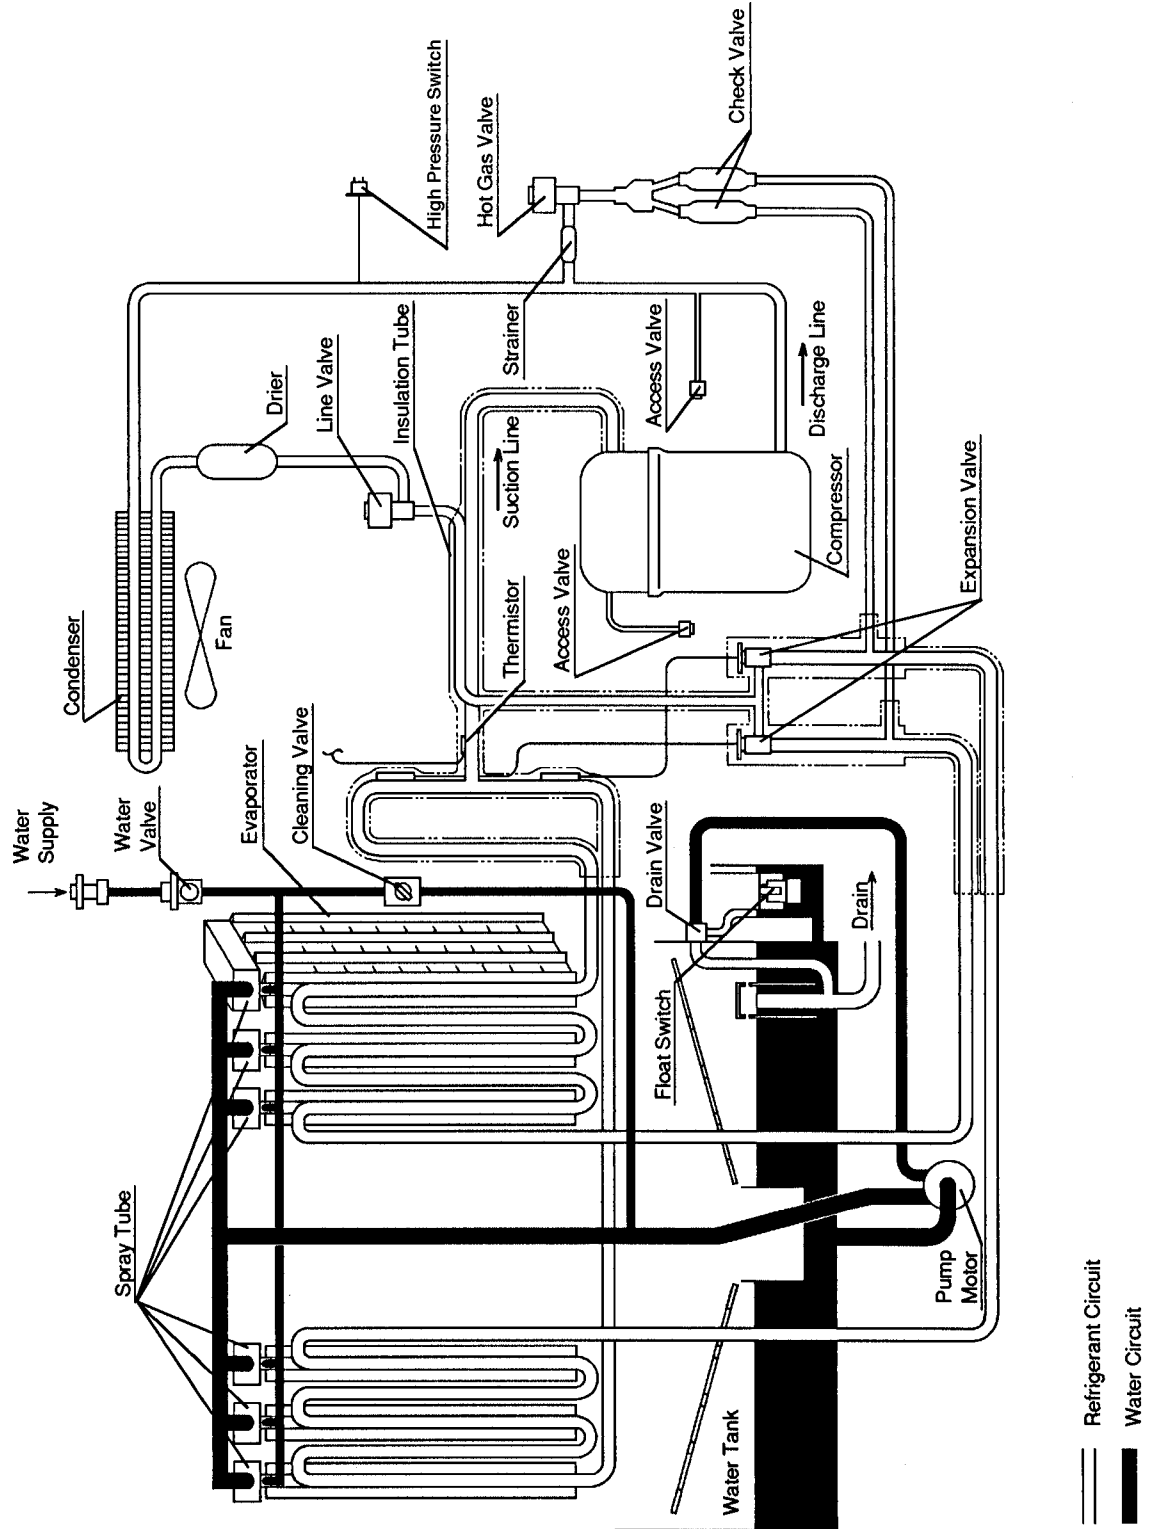

[b] KM-1300SWF, KM-1300SWF3

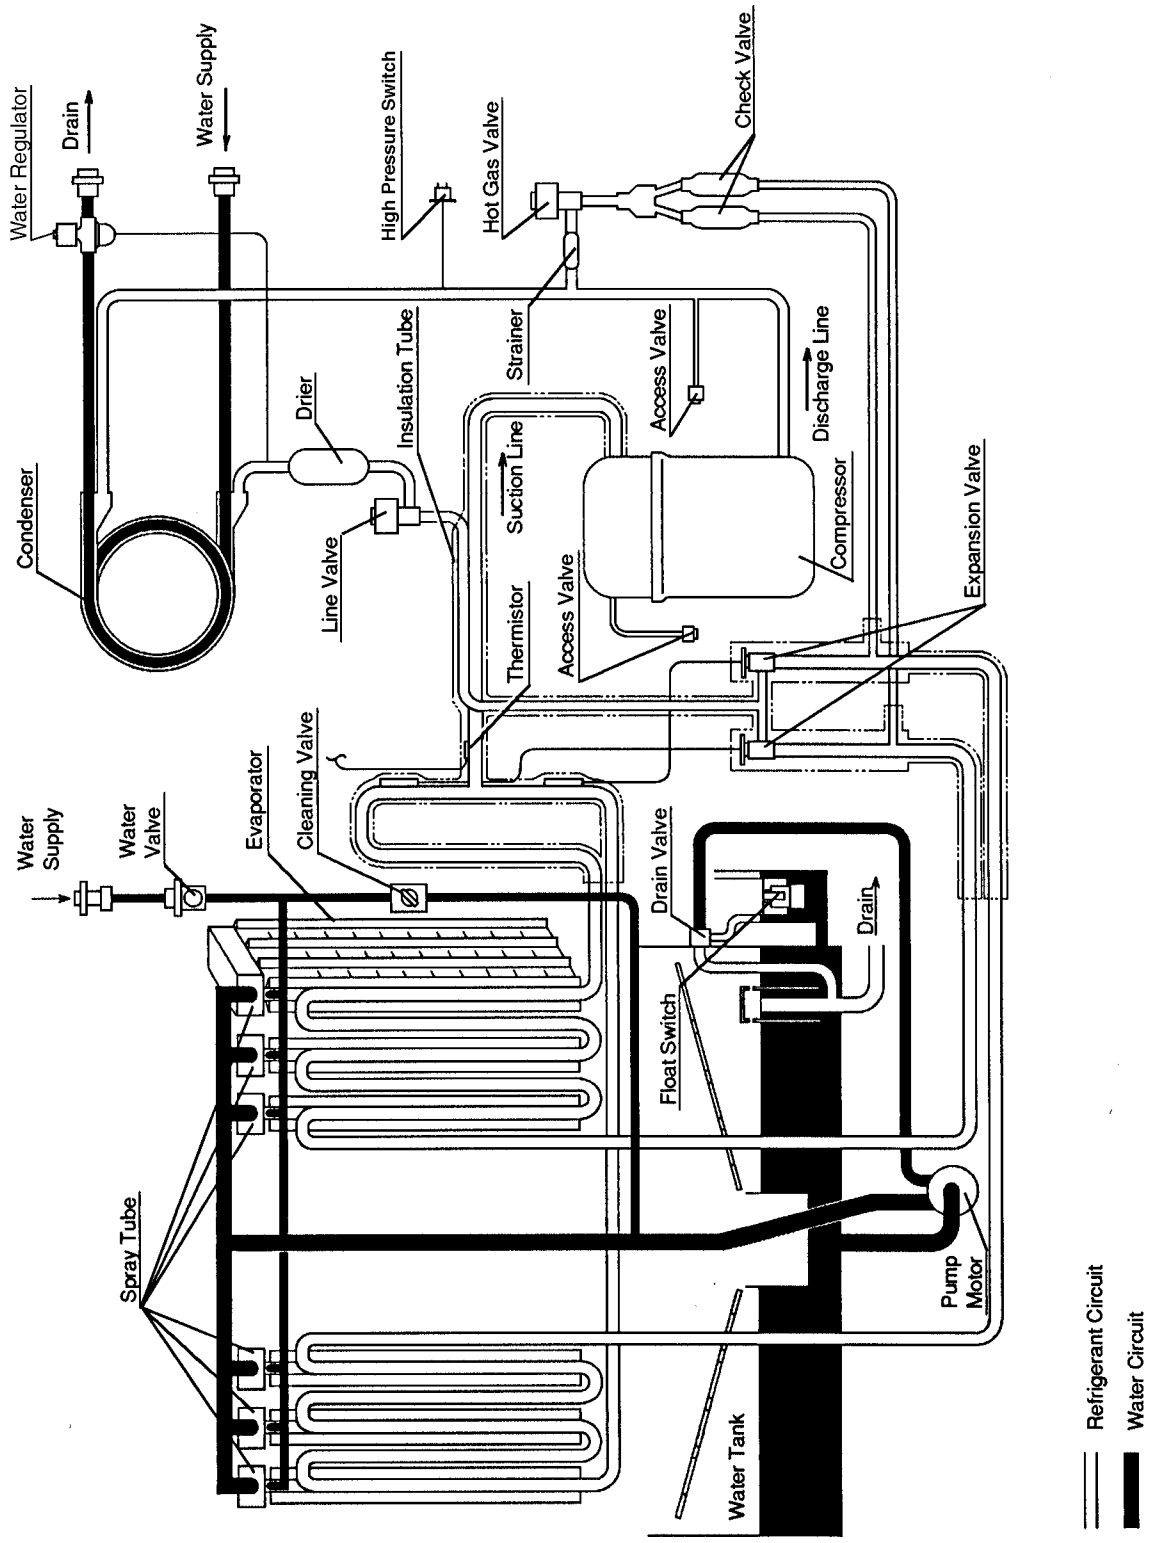


[c] KM-1300SRF, KM-1300SRF3

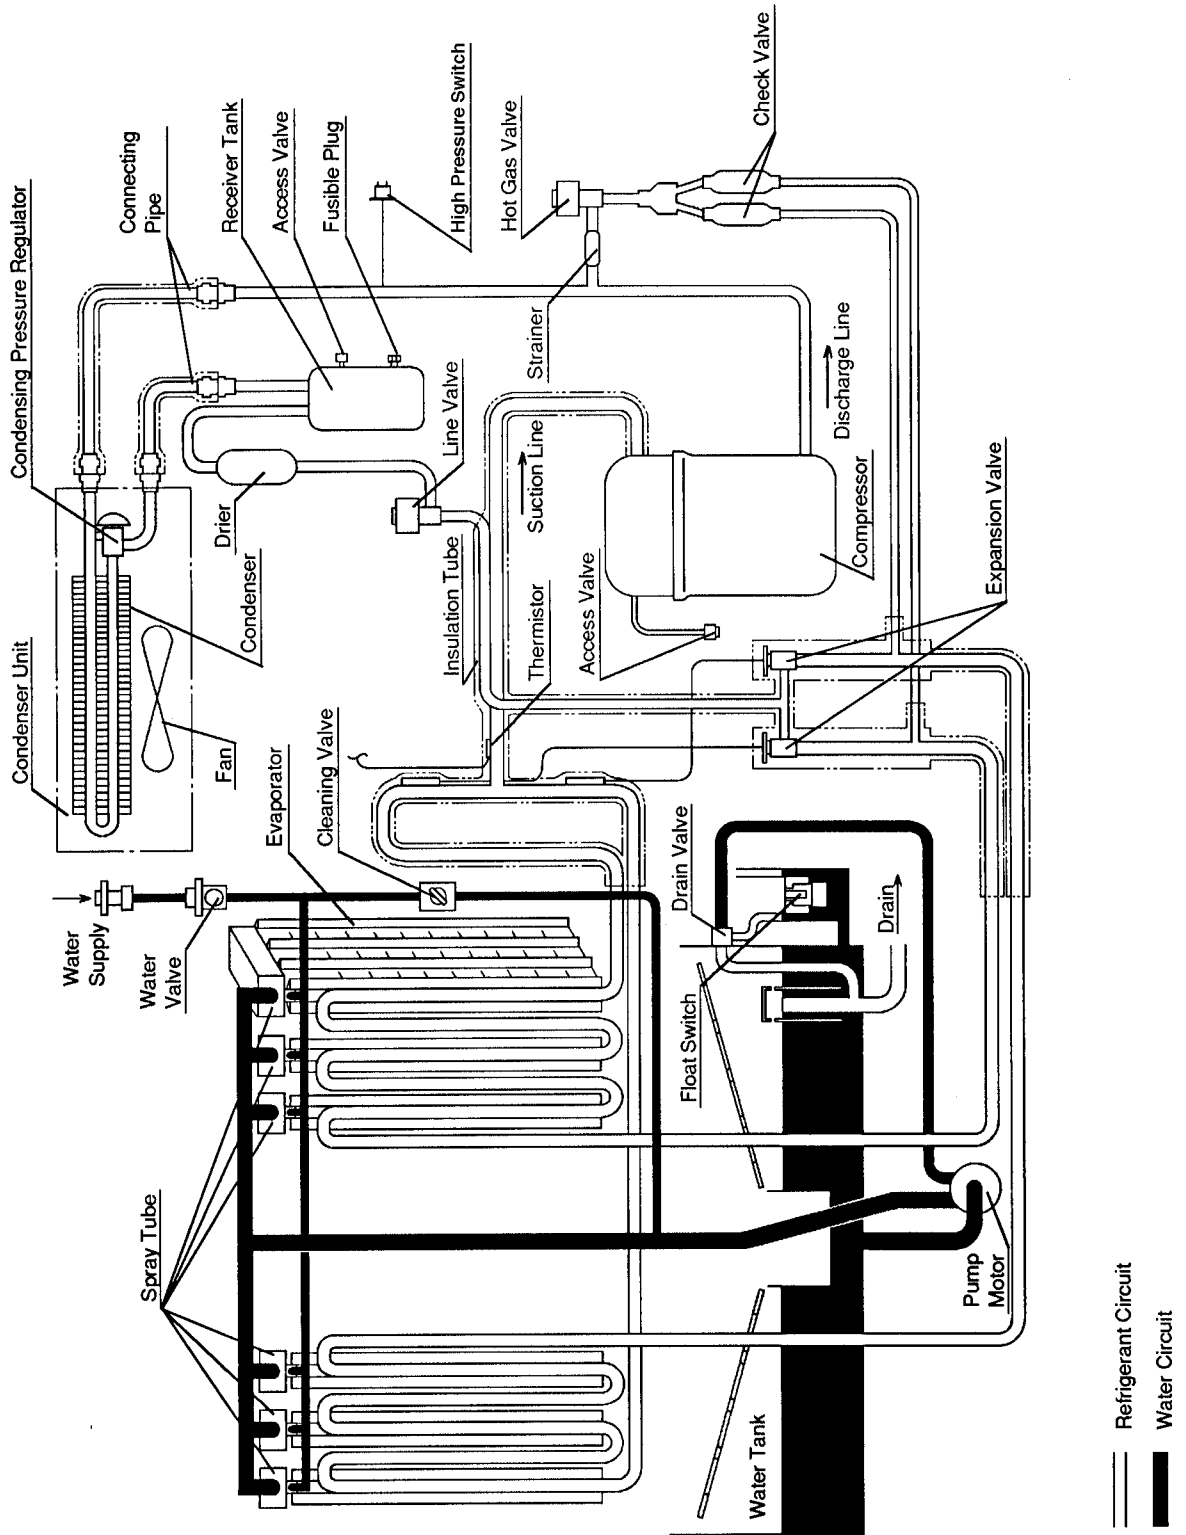

2. WIRING DIAGRAMS

[a] KM-1300SAF

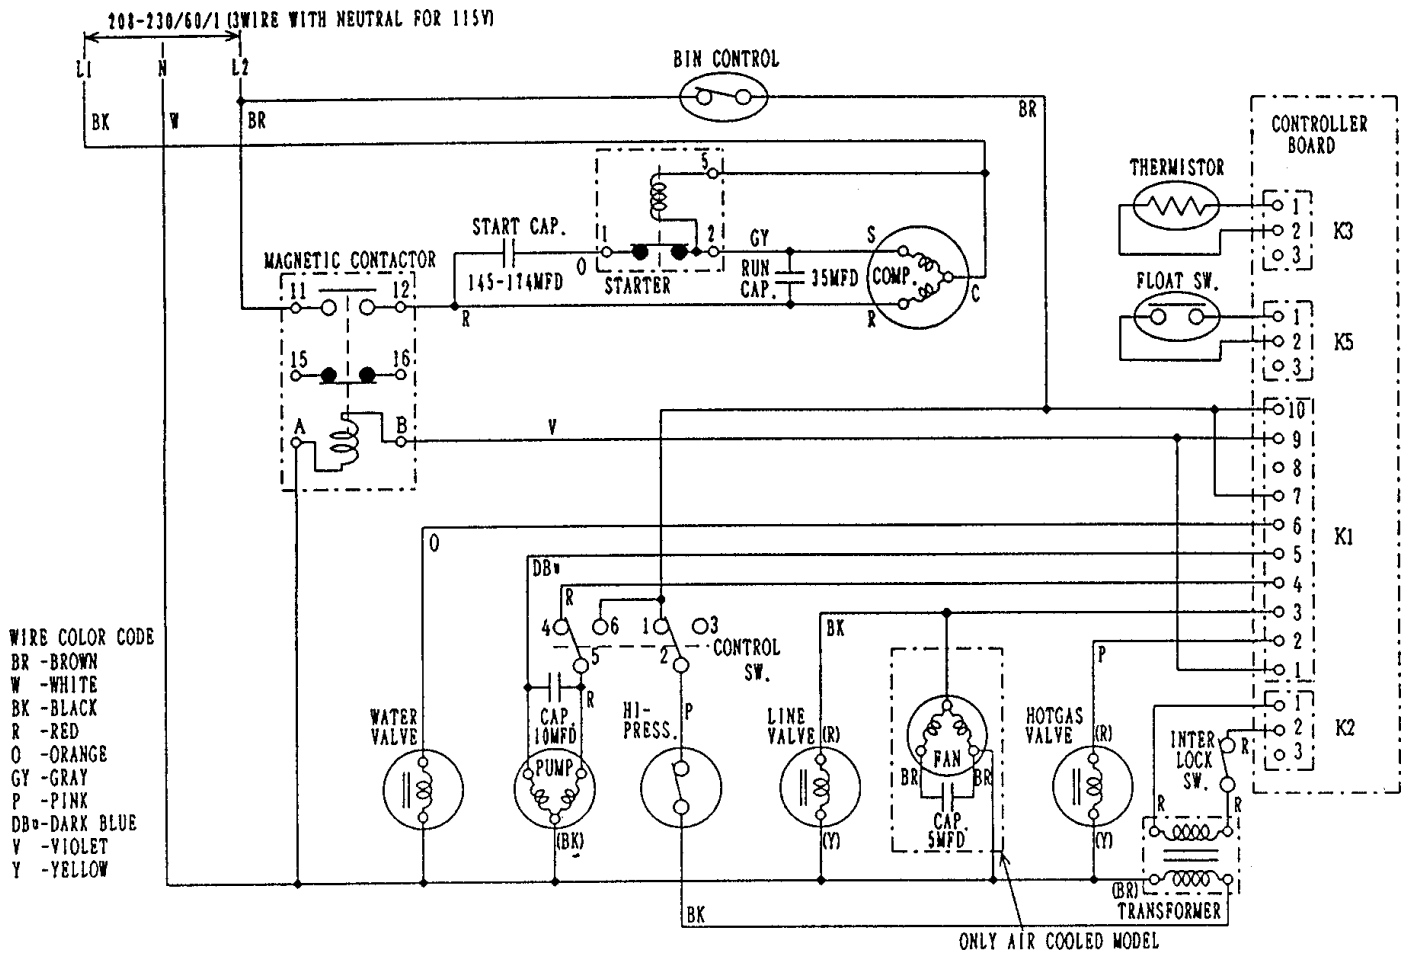


Note: Pressure Switch

Cut-out $412_{0}^{+21.3}$ PSIG

Cut-in 327 ± 21.3 PSIG

[b] KM-1300SWF

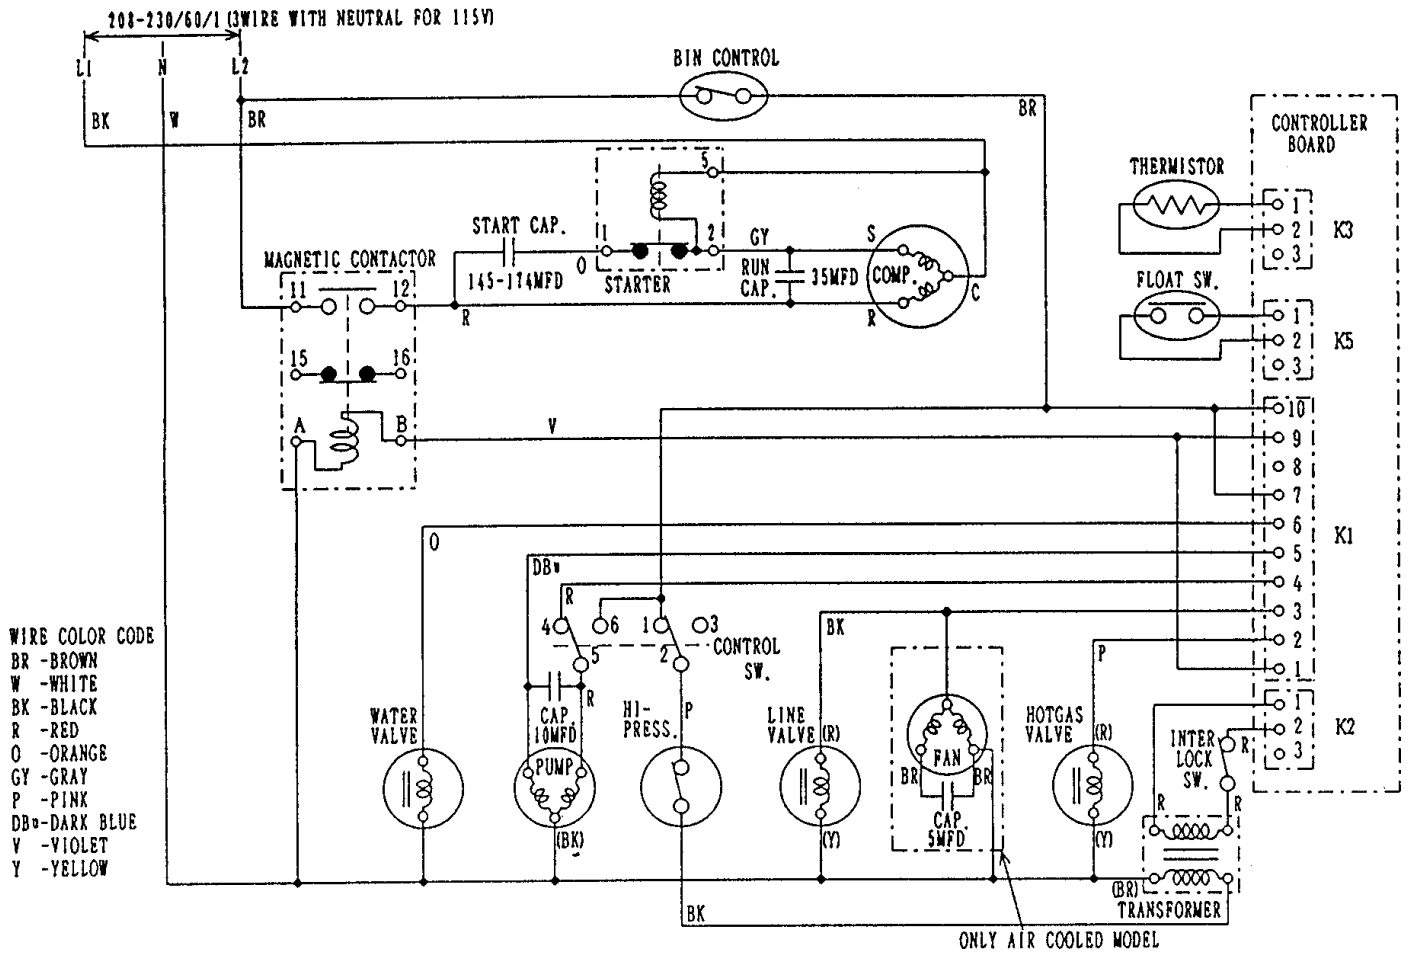


Note: Pressure Switch

Cut-out $384^{+21.3}_0$ PSIG

Cut-in 284.5 ± 21.3 PSIG

[d] KM-1300SAF3

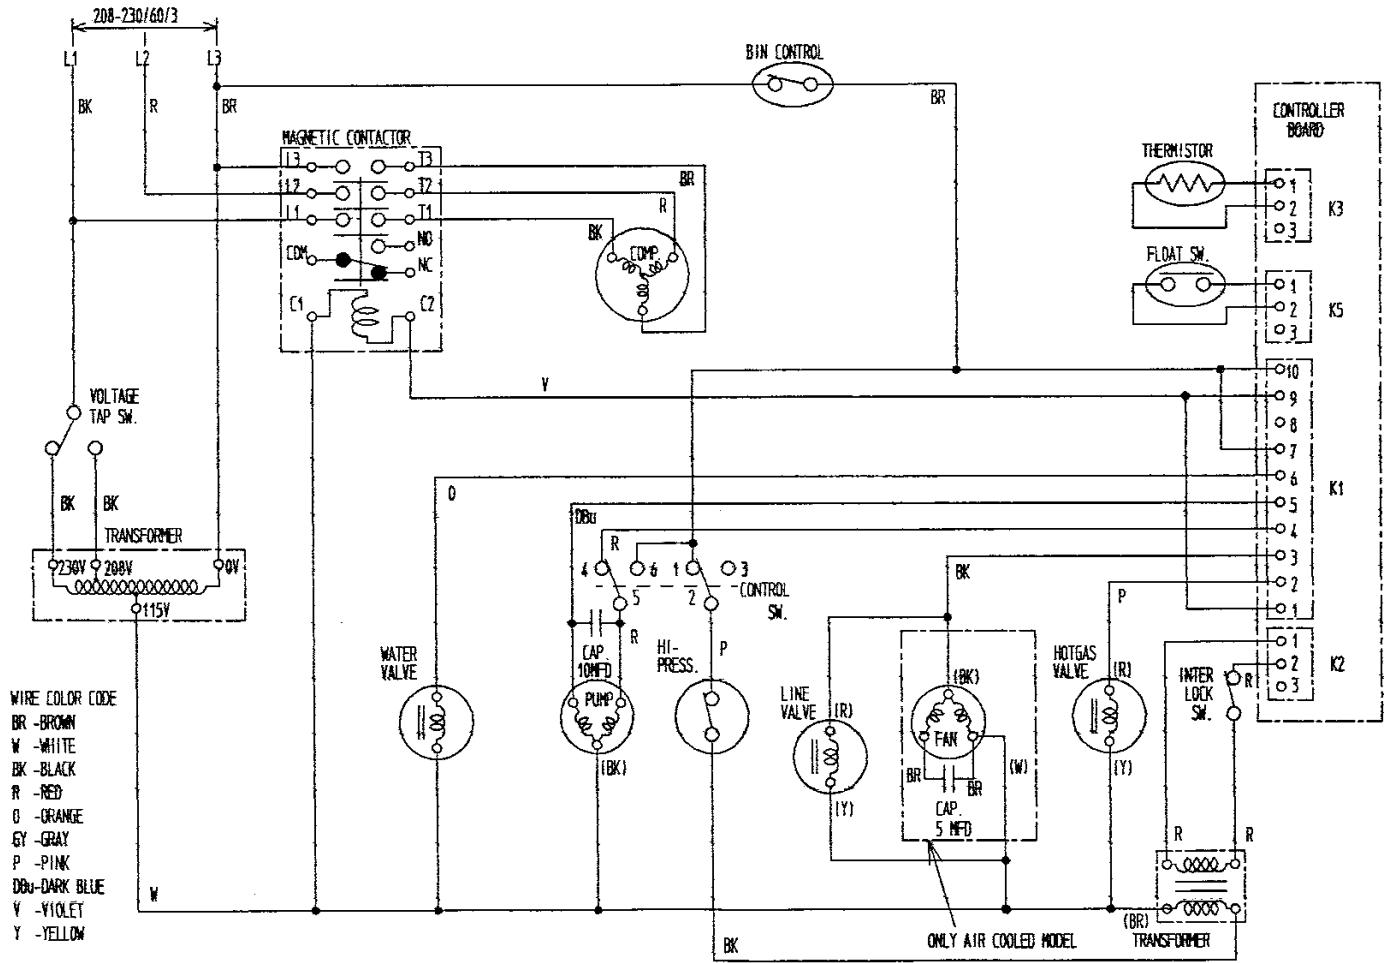


Note: Pressure Switch

Cut-out $412^{+21.3}_0$ PSIG

Cut-in 327 ± 21.3 PSIG

[e] KM-1300SWF3

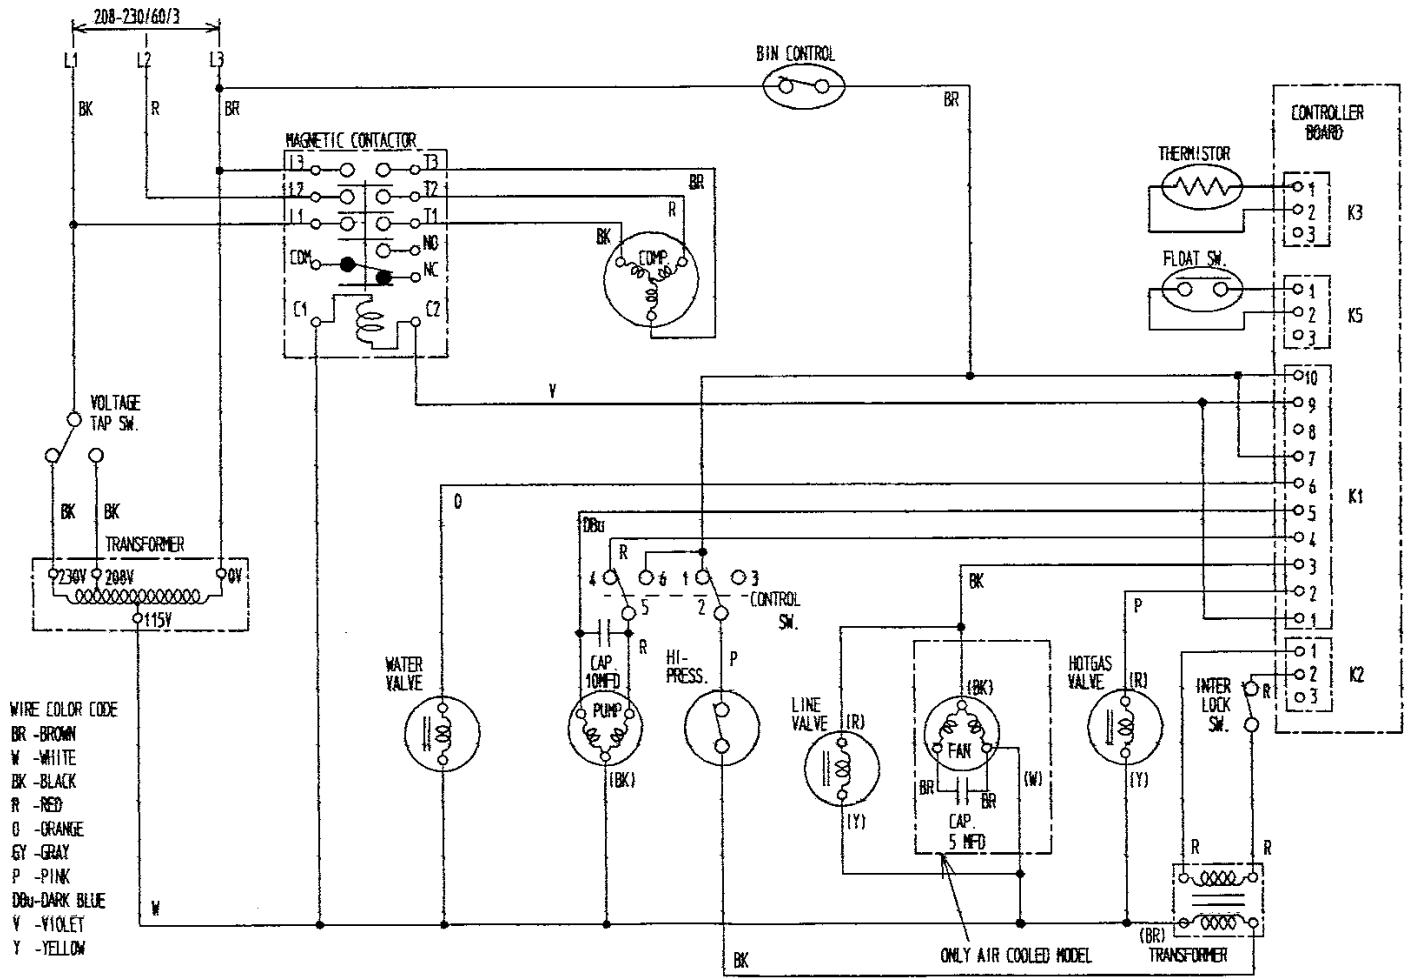


Note: Pressure Switch

Cut-out $384_0^{+21.3}$ PSIG

Cut-in 284 ± 21.3 PSIG

[f] KM-1300SRF3

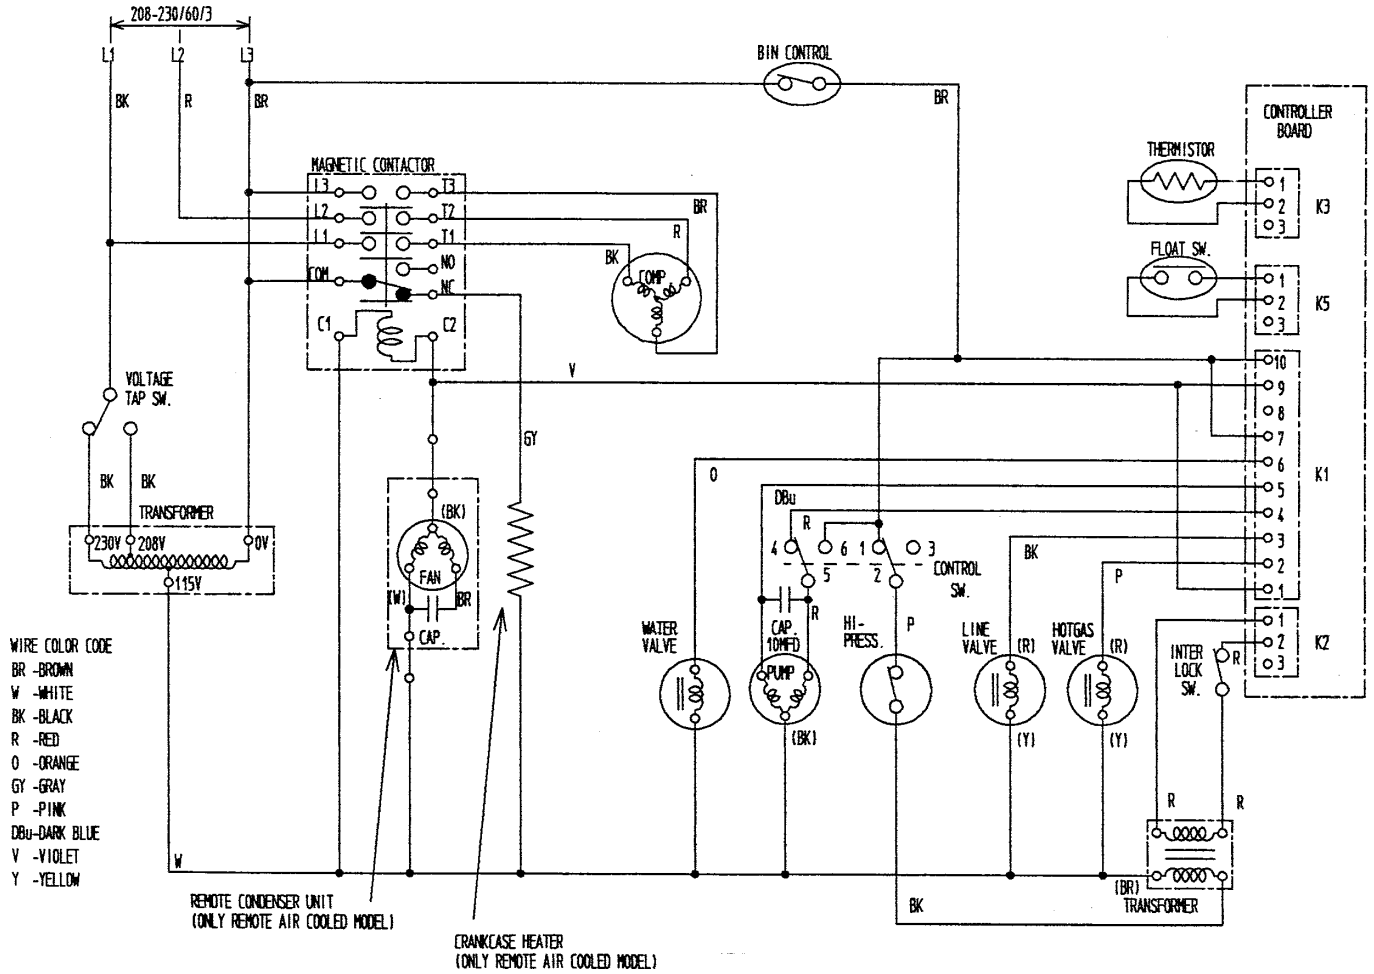


Note: Pressure Switch

Cut-out $412^{+21.3}_0$ PSIG

Cut-in 327 ± 21.3 PSIG

3. TIMING CHART

When Control Sw. is turned OFF, Pressure Sw. is OFF, or Thermistor Temp. exceeds t1.

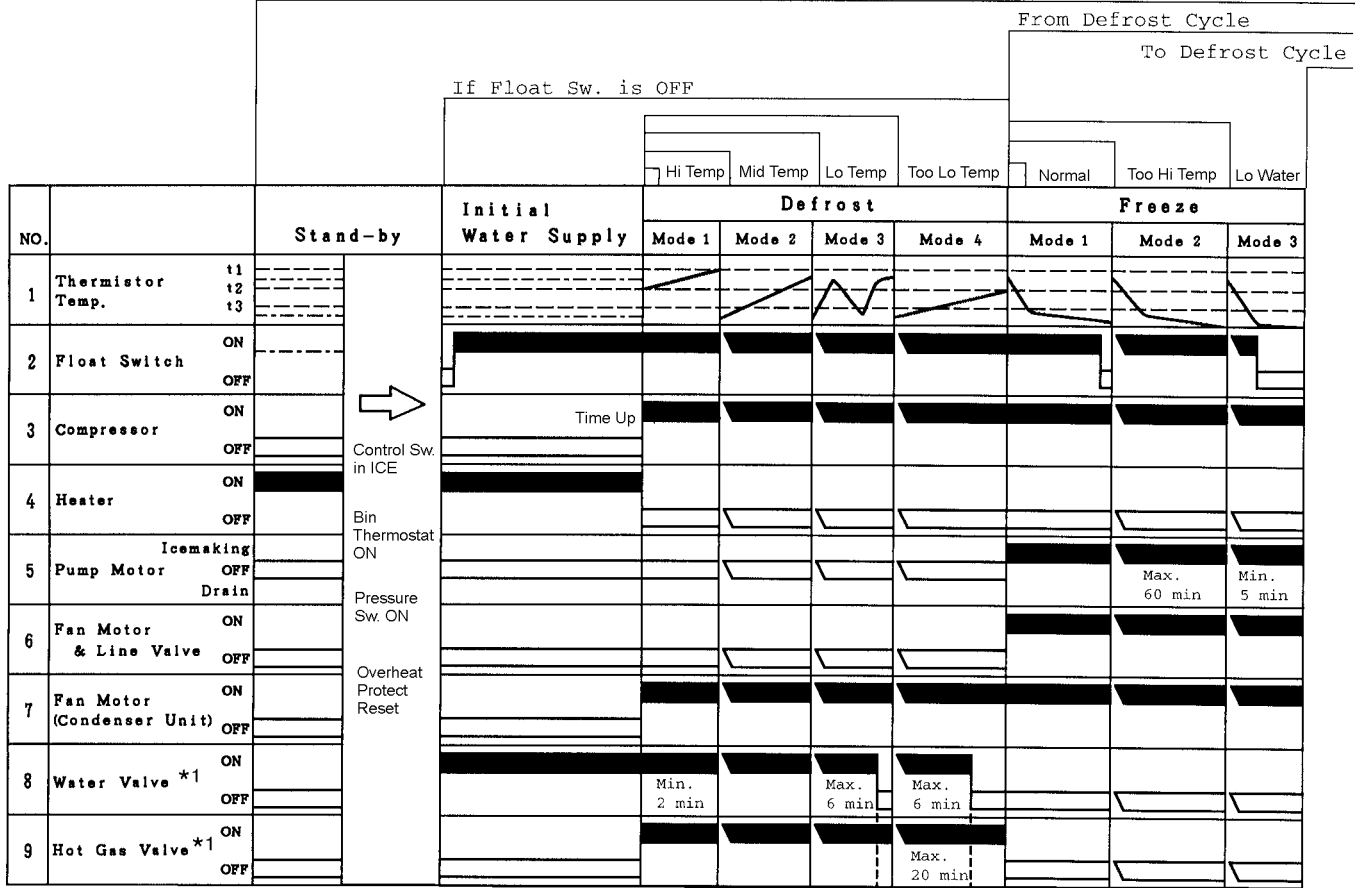


*1 The icemaker does not complete a defrost cycle in the first 2 or 3 minutes. See "II. 2. [d] CONTROLS AND ADJUSTMENTS."

To Stand-by Cycle (When Control Sw. is turned OFF, Pressure Sw. is OFF, or Thermistor Temp. exceeds t1.)

To Freeze Cycle

From Freeze Cycle

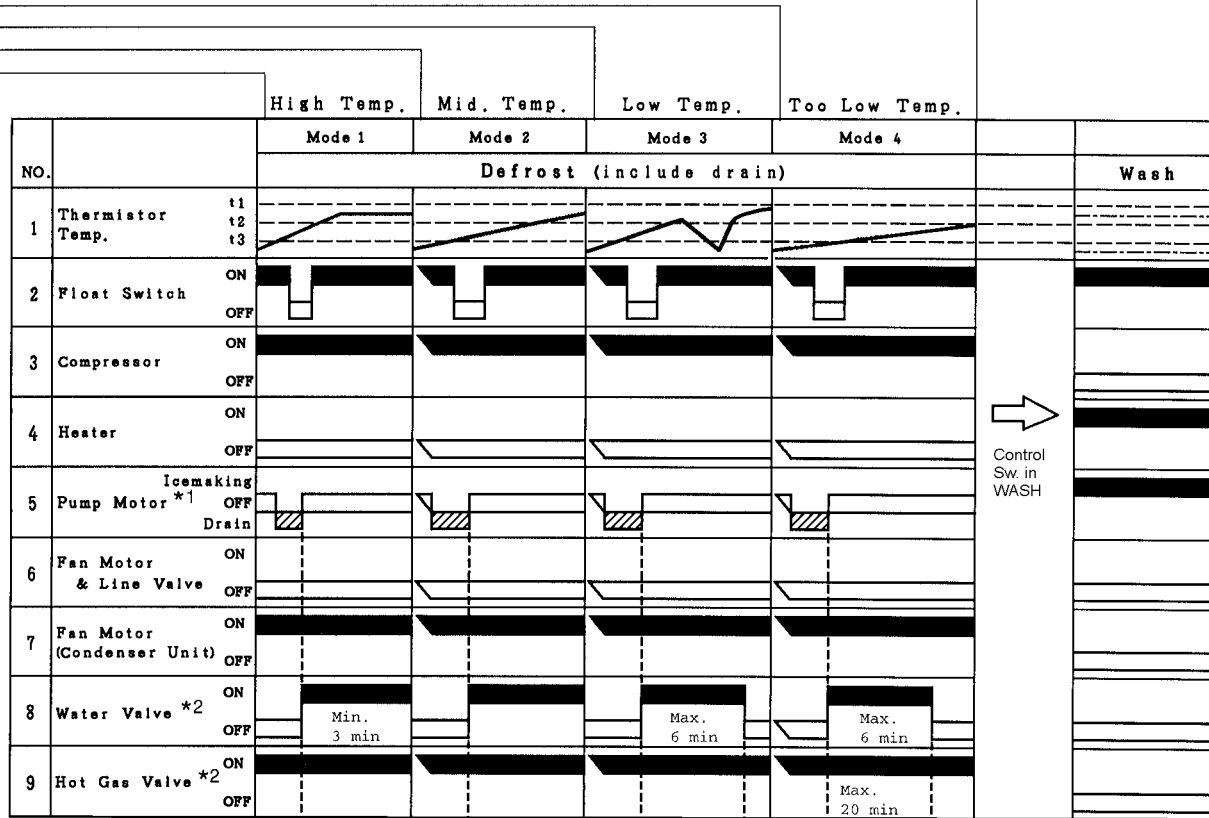

*1 The Pump Motor waits for 2 seconds before starting a drain cycle. See "II. 2. [d] CONTROLS AND ADJUSTMENTS."

*2 The icemaker does not complete a defrost cycle in the first 2 or 3 minutes. See "II. 2. [d] CONTROLS AND ADJUSTMENTS."

4. PERFORMANCE DATA
[a] KM-1300SAF

APPROXIMATE ICE PRODUCTION PER 24 HR.	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
lbs./day (kg./day)	70/21	*1283 (582)	1238 (562)	1135 (515)
	80/27	1249 (566)	1178 (535)	1053 (478)
	90/32	1238 (562)	*1129 (512)	1011 (458)
	100/38	1203 (546)	1101 (500)	* 902 (409)
APPROXIMATE ELECTRIC CONSUMPTION	70/21	*2180	2196	2220
	80/27	2192	2217	2243
	90/32	2196	*2235	2261
	100/38	2202	2241	*2284
APPROXIMATE WATER CONSUMPTION PER 24 HR.	70/21	*479 (1.82)	411 (1.56)	358 (1.36)
	80/27	428 (1.62)	322 (1.22)	291 (1.10)
	90/32	411 (1.56)	*247 (0.94)	205 (0.78)
	100/38	414 (1.57)	237 (0.90)	167 (0.63)
FREEZING CYCLE TIME	70/21	*30	32	36
	80/27	32	35	39
	90/32	32	*37	41
	100/38	33	38	44
HARVEST CYCLE TIME	70/21	*4.5	4	4
	80/27	4	3	3
	90/32	4	*2.2	2
	100/38	4	2	2
HEAD PRESSURE	70/21	*255	273	296
	80/27	268	296	318
	90/32	273	*315	338
	100/38	277	320	360
SUCTION PRESSURE	70/21	*45	47	49
	80/27	46	49	51
	90/32	47	*51	53
	100/38	47	51	55

TOTAL HEAT OF REJECTION 19,800 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in
specifications and design without prior notice.

[b] KM-1300SWF

	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
APPROXIMATE ICE PRODUCTION PER 24 HR.	70/21	*1252 (568)	1233 (559)	1176 (533)
	80/27	1238 (561)	1209 (548)	1134 (514)
	90/32	1233 (559)	*1188 (539)	1119 (508)
lbs./day (kg./day)	100/38	1211 (549)	1172 (532)	*1056 (479)
APPROXIMATE ELECTRIC CONSUMPTION	70/21	*1975	1997	2043
	80/27	1992	2026	2081
	90/32	1997	*2050	2102
watts	100/38	2012	2062	*2150
APPROXIMATE WATER CONSUMPTION PER 24 HR.	70/21	*1587 (6.01)	1663 (6.30)	1890 (7.15)
	80/27	1645 (6.23)	1763 (6.67)	2058 (7.79)
	90/32	1663 (6.30)	*1846 (6.99)	2117 (8.01)
gal./day (m ³ /day)	100/38	1750 (6.62)	1910 (7.23)	*2365 (8.95)
FREEZING CYCLE TIME	70/21	*31.75	32	35
	80/27	32	33	36
	90/32	32	*33.6	36
min.	100/38	33	34	*39
HARVEST CYCLE TIME	70/21	*4.3	4.0	3
	80/27	4	3	3
	90/32	4	*2.25	2
min.	100/38	4	2	*2
HEAD PRESSURE	70/21	*275	278	288
	80/27	277	282	295
	90/32	278	*285	297
PSIG	100/38	282	288	*308
SUCTION PRESSURE	70/21	*47	48	49
	80/27	47	48	49
	90/32	48	*49	50
PSIG	100/38	48	49	*51

HEAT OF REJECTION FROM CONDENSER 15,560 BTU/h [AT 90°F (32°C) / WT 70°F (21°C)]

HEAT OF REJECTION FROM COMPRESSOR 2,650 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

WATER FLOW FOR CONDENSER 88 gal./h [AT 100°F (38°C) / WT 90°F (32°C)]

PRESSURE DROP OF COOLING WATER LINE less than 10 PSIG

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in
specifications and design without prior notice.

[c] KM-1300SRF

	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
APPROXIMATE ICE PRODUCTION PER 24 HR.	70/21	*1296 (588)	1248 (566)	1173 (532)
	80/27	1260 (571)	1185 (538)	1105 (501)
	90/32	1248 (566)	*1133 (514)	1053 (478)
lbs./day (kg./day)	100/38	1230 (558)	1114 (505)	* 980 (445)
APPROXIMATE ELECTRIC CONSUMPTION	70/21	*2300	2315	2339
	80/27	2311	2334	2360
	90/32	2315	*2350	2376
watts	100/38	2321	2356	*2400
APPROXIMATE WATER CONSUMPTION PER 24 HR.	70/21	*456 (1.73)	402 (1.52)	353 (1.34)
	80/27	415 (1.58)	332 (1.26)	296 (1.12)
	90/32	402 (1.52)	*273 (1.03)	230 (0.87)
gal./day (m ³ /day)	100/38	401 (1.52)	263 (1.00)	191 (0.72)
FREEZING CYCLE TIME	70/21	*29	30	33
	80/27	30	31	35
	90/32	30	*32	36
min.	100/38	31	33	40
HARVEST CYCLE TIME	70/21	*5	4	4
	80/27	4	3	3
	90/32	4	*2.2	2
min.	100/38	4	2	2
HEAD PRESSURE	70/21	*220	232	247
	80/27	229	247	262
	90/32	232	*260	276
PSIG	100/38	235	264	290
SUCTION PRESSURE	70/21	*45	46	49
	80/27	46	48	51
	90/32	47	*50	53
PSIG (kg/cm ² G)	100/38	47	51	55

HEAT OF REJECTION FROM
CONDENSER 18,300 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

HEAT OF REJECTION FROM
COMPRESSOR 2,910 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

CONDENSER VOLUME 132 cu. in. (URC-12F)

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in
specifications and design without prior notice.

[d] KM-1300SAF3

APPROXIMATE ICE PRODUCTION PER 24 HR.	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
lbs./day (kg./day)	70/21	*1320 (599)	1257 (570)	1153 (523)
	80/27	1272 (577)	1174 (533)	1060 (481)
	90/32	1257 (570)	*1105 (501)	993 (450)
	100/38	1230 (558)	1079 (489)	*890 (404)
APPROXIMATE ELECTRIC CONSUMPTION	70/21	*2150	2187	2228
	80/27	2178	2235	2271
	90/32	2187	*2275	2314
	100/38	2192	2284	*2350
APPROXIMATE WATER CONSUMPTION PER 24 HR.	70/21	*488 (1.85)	431 (1.63)	388 (1.47)
	80/27	445 (1.68)	355 (1.34)	333 (1.26)
	90/32	431 (1.63)	*292 (1.11)	260 (0.99)
	100/38	435 (1.65)	285 (1.08)	231 (0.87)
FREEZING CYCLE TIME	70/21	*30	32	36
	80/27	32	35	39
	90/32	32	*37.4	41
	100/38	33	38	44.75
HARVEST CYCLE TIME	70/21	*4	3	3
	80/27	4	3	3
	90/32	4	*2.1	2
	100/38	4	2	2
HEAD PRESSURE	70/21	*255	274	296
	80/27	270	299	318
	90/32	274	*320	341
	100/38	277	325	360
SUCTION PRESSURE	70/21	*47	48	50
	80/27	48	50	52
	90/32	48	*52	54
	100/38	49	52	55

TOTAL HEAT OF REJECTION 18,130 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in
specifications and design without prior notice.

[e] KM-1300SWF3

	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
APPROXIMATE ICE PRODUCTION PER 24 HR. lbs./day (kg./day)	70/21 80/27 90/32 100/38	*1301 (590) 1279 (580) 1273 (577) 1250 (567)	1273 (577) 1235 (560) *1204 (546) 1186 (538)	1205 (547) 1152 (523) 1126 (511) *1055 (479)
APPROXIMATE ELECTRIC CONSUMPTION watts	70/21 80/27 90/32 100/38	*2075 2086 2090 2101	2090 2109 *2125 2134	2124 2151 2164 *2200
APPROXIMATE WATER CONSUMPTION PER 24 HR. gal./day (m ³ /day)	70/21 80/27 90/32 100/38	*1533 (5.80) 1574 (5.96) 1586 (6.00) 1664 (6.30)	1586 (6.00) 1656 (6.28) *1715 (6.49) 1769 (6.70)	1776 (6.72) 1911 (7.23) 1945 (7.36) *2158 (8.17)
FREEZING CYCLE TIME min.	70/21 80/27 90/32 100/38	*30.2 31 31 32	31 32 *32.75 33	33 34 35 *36.5
HARVEST CYCLE TIME min.	70/21 80/27 90/32 100/38	*4.2 4 4 4	4 3 *2.2 2	3 3 2 *2
HEAD PRESSURE PSIG	70/21 80/27 90/32 100/38	*270 273 274 277	274 280 *285 287	284 291 295 *305
SUCTION PRESSURE PSIG	70/21 80/27 90/32 100/38	*48 49 49 49	49 50 *51 51	50 51 52 *53

HEAT OF REJECTION FROM CONDENSER 15,450 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

HEAT OF REJECTION FROM COMPRESSOR 2,560 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

WATER FLOW FOR CONDENSER 88 gal./h [AT 100°F (38°C) / WT 90°F (32°C)]

PRESSURE DROP OF COOLING WATER LINE less than 10 PSIG

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in specifications and design without prior notice.

[f] KM-1300SRF3

	AMBIENT TEMP. (°F/°C)	WATER TEMP. (°F/°C)		
		50/10	70/21	90/32
APPROXIMATE ICE PRODUCTION PER 24 HR. lbs./day (kg./day)	70/21 80/27 90/32 100/38	*1308 (593) 1288 (584) 1282 (581) 1252 (568)	1282 (581) 1247 (566) *1218 (552) 1196 (543)	1203 (546) 1145 (520) 1125 (510) *1039 (471)
APPROXIMATE ELECTRIC CONSUMPTION watts	70/21 80/27 90/32 100/38	*2270 2277 2279 2303	2279 2290 *2300 2316	2332 2367 2368 *2430
APPROXIMATE WATER CONSUMPTION PER 24 HR. gal./day (m ³ /day)	70/21 80/27 90/32 100/38	*463 (1.75) 416 (1.58) 401 (1.52) 405 (1.53)	401 (1.52) 320 (1.21) *252 (0.95) 244 (0.92)	356 (1.35) 296 (1.12) 218 (0.82) 187 (0.72)
FREEZING CYCLE TIME min.	70/21 80/27 90/32 100/38	*30 30 31 31	31 32 *33 34	33 35 36 39
HARVEST CYCLE TIME min.	70/21 80/27 90/32 100/38	*4.8 4 4 4	4 3 *2.2 2	4 3 2 2
HEAD PRESSURE PSIG	70/21 80/27 90/32 100/38	*230 239 242 246	242 257 *270 274	259 275 288 305
SUCTION PRESSURE PSIG (kg/cm ² G)	70/21 80/27 90/32 100/38	*50 51 51 52	51 52 *53 54	53 55 56 58

HEAT OF REJECTION FROM
CONDENSER

16,600 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

HEAT OF REJECTION FROM
COMPRESSOR

2,500 Btu/h [AT 90°F (32°C) / WT 70°F (21°C)]

CONDENSER VOLUME

132 cu. in. (URC-12F)

Note: Pressure data is recorded first 5 minutes in freezing cycle.
The data without * marks should be used for reference.

We reserve the right to make changes in
specifications and design without prior notice.

IV. SERVICE DIAGNOSIS

1. NO ICE PRODUCTION

PROBLEM	POSSIBLE CAUSE		REMEDY
[1] The icemaker will not start	a) Power Supply	1. "OFF" position.	1. Move to "ON" position.
		2. Loose connections.	2. Tighten.
		3. Bad contacts.	3. Check for continuity and replace.
		4. Voltage too high.	4. Check and get recommended voltage.
	b) Fuse (Inside Fused Disconnect, if any)	1. Blown out.	1. Check for short circuit and replace.
	c) Control Switch	1. "OFF" position.	1. Move to "ICE" position.
		2. Bad contacts.	2. Check for continuity and replace.
	d) Bin Control Thermostat	1. Tripped with bin filled with ice.	1. Remove ice.
		2. Ambient temperature too cool.	2. Increase ambient temperature.
		3. Set too warm.	3. See "II.2.[d] CONTROLS AND ADJUSTMENTS, 5) Bin Control."
		4. Bulb out of position.	4. Place in position.
		5. Bad contacts or leaks in bulb.	5. Check for continuity and replace.
	e) High Pressure Control	1. Bad contacts.	1. Check for continuity and replace.
	f) Transformer	1. Thermal fuse blown out or coil winding opened.	1. Replace.
	g) Wiring to Controller Board	1. Loose connections or open.	1. Check for continuity and replace.
	h) Thermistor	1. Leads short-circuit or open and High Temperature Safety operates.	1. See "II.2.[d] CONTROLS AND ADJUSTMENTS, 1) Defrost Control."
	i) Hot Gas Solenoid Valve	1. Continues to open in freeze cycle and High Temperature Safety operates.	1. Check for power off in freeze cycle and replace.
	j) Water Supply Line	1. Water supply off and water supply cycle does not finish.	1. Check and get recommended pressure.
		2. Condenser water pressure too low or off and Pressure Control opens and closes frequently to finally operate High Temperature Safety.	2. Check and get recommended pressure.
	k) Water Solenoid	1. Mesh filter or orifice gets clogged and water supply cycle does not finish.	1. Clean.
2. Coil winding opened.		2. Replace.	
3. Wiring to Water Valve.		3. Check for loose connection or open, and replace.	

PROBLEM	POSSIBLE CAUSE		REMEDY
	l) Controller Board	1. Defective.	1. See "II.2[e] CHECKING CONTROLLER BOARD."
	m) Interlock Switch (Cleaning Valve)	1. "OFF" position.	1. Move to "ON" position.
		2. Bad contacts.	2. Check for continuity and replace.
[2] Water continues to be supplied, and the ice-maker will not start.	a) Float switch	1. Connector disconnected.	1. Place in position.
		2. Leads opened or defective switch.	2. Check and replace.
		3. Float does not move freely.	3. Clean or replace.
	b) Controller Board	1. Defective.	1. Replace.
[3] Compressor will not start or stops operating	a) Wash Switch	1. "WASH" position.	1. Move to "ICE" position.
		2. Bad contacts.	2. Check and replace.
	b) High Pressure Controller	1. Dirty Air Filter or Condenser.	1. Clean.
		2. Ambient or condenser water temp. too warm.	2. Reduce ambient temp.
		3. Refrigerant overcharged.	3. Recharge.
		4. Condenser water pressure too low or off. [Water-cooled model only].	4. Check and get recommended pressure.
		5. Fan not operating. [Except water-cooled model].	5. See chart 1 - [6].
		6. Refrigerant line or components plugged.	6. Clean and replace Drier.
	c) Water Regulator	1. Set too high.	1. Adjust lower.
	d) Overload Protector	1. Bad contacts.	1. Check for continuity and replace.
		2. Voltage too low.	2. Increase voltage.
		3. Refrigerant overcharged or undercharged.	3. Recharge.
		4. Line Valve continues to close in freeze cycle and Overload Protector operates.	4. Check Line Valve's operation in freeze cycle and replace.
	e) Starter	1. Bad contacts.	1. Check and replace.
		2. Coil winding opened.	2. Replace.
	f) Start Capacitor or Run Capacitor	1. Defective.	1. Replace.
	g) Magnetic Contactor	1. Bad contacts.	1. Check for continuity and replace.
		2. Coil winding opened.	2. Replace.
	h) Compressor	1. Wiring to Compressor.	1. Check for loose connection or open, and replace.
		2. Defective.	2. Replace.
3. Protector tripped.		3. Reduce temperature.	
i) Controller board	1. Defective.	1. See "II.2. [e] CHECKING CONTROLLER BOARD."	
[4] Water continues to be supplied in freeze cycle.	a) Water Solenoid Valve	1. Diaphragm does not close.	1. Check for water leaks with icemaker off.
	b) Controller Board	1. Defective.	1. See "II.2.[e] CHECKING CONTROLLER BOARD."

PROBLEM	POSSIBLE CAUSE		REMEDY
[5] No water comes from Spray Tubes. Water Pump will not start, or freeze cycle time is too short.	a) Water Supply Line	1. Water pressure too low and water level in Water Tank too low.	1. Check and get recommended pressure.
	b) Water Solenoid Valve	1. Dirty mesh filter or orifice and water level in Water Tank too low.	1. Clean.
	c) Water System	1. Water leaks.	1. Check connections for water leaks, and replace.
		2. Clogged.	2. Clean.
		3. Pump Out Check Valve leaking by.	3. Check assembly and clean.
	d) Pump Motor	1. Motor winding opened.	1. Replace.
		2. Bearing worn out.	2. Replace.
		3. Wiring to Pump Motor.	3. Check for loose connection or open, and replace.
		4. Defective Capacitor.	4. Replace.
		5. Defective or bound impeller.	5. Replace and clean.
6. Mechanical Seal worn out.		6. Check and replace.	
e) Controller Board	1. Defective.	1. See "II.2. [e] CHECKING CONTROLLER BOARD."	
[6] Fan Motor will not start, or is not operating.	a) Fan Motor	1. Motor winding opened.	1. Replace.
		2. Bearing worn out.	2. Replace.
		3. Wiring to Fan Motor.	3. Check for loose connection or open, and replace.
		4. Defective Capacitor.	4. Replace.
		5. Fan blade bound.	5. Check and replace.
	b) Controller Board	1. Defective.	1. See "II.2. [e] CHECKING CONTROLLER BOARD."
[7] All components run but no ice is produced.	a) Refrigerant	1. Undercharged.	1. Check for leaks and recharge.
		2. Air or moisture trapped.	2. Replace Drier, and recharge.
	b) Compressor	1. Defective valve.	1. Replace.
	c) Hot Gas Solenoid Valve	1. Continues to open in freeze cycle.	1. Check and replace.
	d) Line Valve	1. Continues to close in freeze cycle.	1. Check and replace
	e) Water Solenoid Valve	1. Water Solenoid Valve is open during freeze.	1. Check for water leaks with icemaker off.
f) Water Supply Line [Water-cooled model only]	1. Condenser water pressure too low or off and Pressure Control opens and closes frequently.	1. Check and get recommended pressure.	

2. EVAPORATOR IS FROZEN UP

PROBLEM	POSSIBLE CAUSE		REMEDY
[1] Freeze cycle time is too long.	a) Float Switch	1. Leads short-circuit or defective switch.	1. Check and replace.
		2. Float does not move freely.	2. Clean or replace.
	b) Water Solenoid Valve	1. Diaphragm does not close.	1. Check for water leaks with icemaker off.
	c) Controller Board	1. Defective.	1. See "II.2[e] CHECKING CONTROLLER BOARD."
[2] All ice formed on Evaporator does not fall into bin in harvest cycle.	a) Evaporator	1. Scaled up.	1. Clean.
	b) Water Supply Line	1. Water pressure too low.	1. Check and get recommended pressure.
	c) Water Filter System	1. Dirty/Restricted.	1. Replace filter.
	d) Water Solenoid Valve	1. Dirty mesh filter or orifice.	1. Clean.
	e) Ambient and/or water temperature	1. Too cool.	1. Increase temperature.
	f) Line Valve	1. Continues to open in harvest cycle.	1. Check operation in harvest cycle and replace.
	g) Thermistor	1. Out of position or loose attachment.	1. See "V. 11. REMOVAL AND REPLACEMENT OF THERMISTOR."
	h) Controller Board	1. Defrost Timer is set too short.	1. Adjust longer, referring to "II. 2. [d] CONTROLS AND ADJUSTMENT, 2) Defrost Timer."
2. Defective.		2. See "II. 2.[e] CHECKING CONTROLLER BOARD."	
[3] Others	a) Spray Tubes	1. Clogged.	1. Clean.
		2. Out of position.	2. Place in position.
	b) Water System	1. Dirty.	1. Clean.
	c) Refrigerant	1. Undercharged.	1. Check for leaks and recharge.
	d) Expansion Valve	1. Bulb out of position or loose attachment.	1. Place in position.
		2. Defective.	2. Replace.
	e) Hot Gas Solenoid Valve	1. Coil winding opened.	1. Replace.
		2. Plunger does not move.	2. Replace.
3. Wiring to Hot Gas Valve.		3. Check for loose connection or open, and replace.	
f) Water Supply Line	1. Too small; requires 1/2" OD line dedicated per machine.	1. Increase water line size.	
g) Water filter	1. Flow rate too small.	1. Replace with filter that has larger flow rate.	

3. LOW ICE PRODUCTION

PROBLEM	POSSIBLE CAUSE	REMEDY
[1] Freeze cycle time is long.	a) See chart 1 - [3], and check dirty Air Filter or Condenser, ambient or water temperature, water pressure, Water Regulator or refrigerant charge.	
	b) See chart 2 - [1], and check Float Switch, Water Solenoid Valve or Controller Board.	
[2] Harvest cycle time is long	a) See chart 2 - [2], and check Controller Board, Thermistor, Evaporator, ambient and/or water temperature, water supply line, Water Solenoid Valve, Line Valve, or Hot Gas Valve.	

4. ABNORMAL ICE

PROBLEM	POSSIBLE CAUSE	REMEDY	
[1] Small Cube	a) Ice Cube Guide	1. Out of position. Circulated water falls into bin.	1. Place in position.
	b) See chart 1 - [5], and check water supply line, Water Solenoid Valve, water system, Pump Motor or Controller Board.		
	c) Pump Out Check Valve	1. Dirty.	1. Clean.
[2] Cloudy or irregular cube	a) See chart 2 - [1] and - [3], and check Float Switch, Water Solenoid Valve, Controller Board, Spray Tubes, water system, refrigerant charge or Expansion Valve.		
	b) Spray Guide	1. Dirty.	1. Clean.
	c) Water Quality	1. High hardness or contains impurities.	1. Install a water filter or softener.

5. OTHERS

PROBLEM	POSSIBLE CAUSE	REMEDY	
[1] Icemaker will not stop when bin is filled with ice.	a) Bin Control Thermostat	1. Set too cold.	1. Adjust warmer.
		2. Defective.	2. Replace.
[2] Abnormal noise	a) Pump Motor	1. Bearings worn out.	1. Replace.
	b) Fan Motor	1. Bearings worn out.	1. Replace.
		2. Fan blade deformed.	2. Replace fan blade.
		3. Fan blade does not move freely.	3. Replace.
	c) Compressor	1. Bearings worn out, or cylinder valve broken.	1. Replace.
2. Mounting pad out of position.		2. Reinstall	
d) Refrigerant Lines	1. Rub or touch lines or other surfaces.	1. Replace.	
[3] Ice in storage bin often melts.	a) Bin Drain	1. Plugged.	1. Clean.
	b) Icemaker and Bin	1. Drains not run separately.	1. Separate the Drain Lines.

V. REMOVAL AND REPLACEMENT OF COMPONENTS

IMPORTANT

Ensure all components, fasteners and thumbscrews are securely in place after the equipment is serviced.

IMPORTANT

1. The Polyol Ester (POE) oils used in R-404A units can absorb moisture quickly. Therefore it is important to prevent moisture from entering the system when replacing or servicing parts.
2. Always install a new filter drier every time the sealed refrigeration system is opened.
3. Do not leave the system open for longer than 5 minutes when replacing or servicing parts.

1. SERVICE FOR REFRIGERANT LINES

[a] REFRIGERANT RECOVERY

The icemaker unit is provided with two Refrigerant Access Valves—one on the low-side and one on the high-side line. Using proper refrigerant practices recover the refrigerant from the Access Valves and store it in an approved container. Do not discharge the refrigerant into the atmosphere.

[b] EVACUATION AND RECHARGE [R-404A]

- 1) Attach Charging Hoses, a Service Manifold and a Vacuum Pump to the system. Be sure to connect charging hoses to both High and Low -side Access Valves.

IMPORTANT

The vacuum level and Vacuum Pump may be the same as those for current refrigerants. However, the rubber hose and gauge manifold to be used for evacuation and refrigerant charge should be exclusively for POE oils.

- 2) Turn on the Vacuum Pump. Never allow the oil in the Vacuum Pump to flow backward.
- 3) Allow the Vacuum Pump to pull down to a 29.9" Hg vacuum. Evacuating period depends on pump capacity.
- 4) Close the Low-side Valve and High-side Valve on the Service Manifold.

- 5) Disconnect the Vacuum Pump, and attach a Refrigerant Service Cylinder to the High-side line. Remember to loosen the connection, and purge the air from the Hose. For water-cooled models, see the Nameplate for the required refrigerant charge. For remote air-cooled models, see the Charge Label in the machine compartment. Hoshizaki recommends only virgin refrigerant or reclaimed refrigerant which meets ARI Standard No. 700-88 be used.
- 6) A liquid charge is recommended for charging an R-404A system. Invert the service cylinder. Open the High-side, Service Manifold Valve.
- 7) Allow the system to charge with liquid until the pressures balance.
- 8) If necessary, add any remaining charge to the system through the Low-side. Use a throttling valve or liquid dispensing device to add the remaining liquid charge through the Low-side access port with the unit running.
- 9) Close the two Refrigerant Access Valves, and disconnect the Hoses and Service Manifold.
- 10) Cap the Access Valves to prevent a possible leak.

2. BRAZING

DANGER

1. Refrigerant R-404A itself is not flammable at atmospheric pressure and temperatures up to 176° F.
2. Refrigerant R-404A itself is not explosive or poisonous. However, when exposed to high temperatures (open flames) R-404A can be decomposed to form hydrofluoric acid and carbonyl fluoride both of which are hazardous.
3. Always recover the refrigerant and store it in an approved container. Do not discharge the refrigerant into the atmosphere.
4. Do not use silver alloy or copper alloy containing Arsenic.
5. Do not use R-404A as a mixture with pressurized air for leak testing. Refrigerant leaks can be detected by charging the unit with a little refrigerant, raising the pressure with nitrogen and using an electronic leak detector.

Note: All brazing-connections inside the Evaporator Case are clear-paint coated. Sandpaper the brazing connections before unbrazing the components. Use a good abrasive cloth to remove coating.

3. REMOVAL AND REPLACEMENT OF COMPRESSOR

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

Note: When replacing a Compressor with a defective winding, be sure to install the new Start Capacitor and Start Relay supplied with the replacement Compressor. Due to the ability of the POE oil in the compressor to absorb moisture quickly, the Compressor must not be opened more than 15 minutes for replacement or service, . Do not mix lubricants of different compressors even if both are charged with R-404A, except when they use the same lubricant.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Remove the Terminal Cover on the Compressor, and disconnect the Compressor Wiring.
- 5) Remove the Discharge and Suction Pipes using brazing equipment.
- 6) Remove the Hold-down Bolts, Washers and Rubber Grommets.
- 7) Slide and remove the Compressor. Unpack the new Compressor package. Install the new Compressor.
- 8) Attach the Rubber Grommets of the prior Compressor.
- 9) Sandpaper the Suction, Discharge and Process Pipes.
- 10) Place the Compressor in position, and secure it using the Bolts and Washers.
- 11) Remove plugs from the Suction, Discharge and Process Pipes.
- 12) Braze the Process, Suction and Discharge lines (Do not change this order), while purging with nitrogen gas flowing at the pressure 3-4 PSIG.
- 13) Install the new Filter Drier.
- 14) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.

- 15) Evacuate the system, and charge it with refrigerant. See the Nameplate for the required refrigerant charge.
- 16) Connect the Terminals, and replace the Terminal Cover in its correct position.
- 17) Replace the panels in their correct positions.
- 18) Turn on the power supply.

4. REMOVAL AND REPLACEMENT OF DRIER

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Remove the Drier.
- 5) Install the new Drier, with the arrow on the Drier, in the direction of the refrigerant flow. Use nitrogen gas at the pressure of 3 - 4 PSIG when brazing the tubings.
- 6) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 7) Evacuate the system, and charge it with refrigerant. For water-cooled models, see the Nameplate for the required refrigerant charge. For remote air-cooled models, see the Charge Label in the machine compartment.
- 8) Replace the panels in their correct positions.
- 9) Turn on the power supply.

5. REMOVAL AND REPLACEMENT OF EXPANSION VALVE

IMPORTANT

Sometimes moisture in the refrigerant circuit exceeds the Drier capacity and freezes up at the Expansion Valve. Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Remove the insulation and the Expansion Valve Bulb on the suction line.
- 5) Remove the Expansion Valve Cover, and disconnect the Expansion Valve using brazing equipment.
- 6) Braze the new Expansion Valve, with nitrogen gas flowing at the pressure of 3-4 PSIG.

WARNING

1. Do not heat the wall. Place a steel barrier for protection.
2. Always protect the valve body by using a damp cloth to prevent the valve from overheating. Do not braze with the valve body exceeding 250°F.

- 7) Install the new Drier.
- 8) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 9) Evacuate the system, and charge it with refrigerant. For water-cooled models, see the Nameplate for the required refrigerant charge. For remote air-cooled models, see the Charge Label in the machine compartment.
- 10) Attach the Bulb to the suction line in position. Be sure to secure it with clamps and to insulate it.
- 11) Place the new set of Expansion Valve Covers in position.
- 12) Replace the panels in their correct position.
- 13) Turn on the power supply.

6. REMOVAL AND REPLACEMENT OF HOT GAS VALVE, LINE VALVE AND GAS VALVE

CAUTION

Always use a copper tube of the same diameter and length when replacing the hot gas lines; otherwise the performance may be reduced.

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Remove the screw and the Solenoid.
- 5) Disconnect the Hot Gas Valve, Line Valve or Gas Valve using brazing equipment.
- 6) Install the new valve.

WARNING

Always protect the valve body by using a damp cloth to prevent the valve from overheating. Do not braze with the valve body exceeding 250°F.

- 7) Install the new Drier.
- 8) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 9) Evacuate the system, and charge it with refrigerant. For air-cooled and water-cooled models, see the Nameplate for the required refrigerant charge. For remote air-cooled models, see the Charge Label in the machine compartment.
- 10) Cut the leads of the Solenoid allowing enough lead length to reconnect using closed end connectors.

- 11) Connect the new Solenoid leads.
- 12) Attach the Solenoid to the valve body, and secure it with a screw.
- 13) Replace the panels in their correct positions.
- 14) Turn on the power supply.

7. REMOVAL AND REPLACEMENT OF EVAPORATOR

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repairs or replacement have been made.

- 1) Turn off the power supply.
- 2) Remove the panels and the Top Insulation over the Evaporator.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Remove the Spray Tubes and the Insulations at the “U” shaped notch where the refrigeration tubings go through the molded chassis.
- 5) Remove the Insulation Tube, and disconnect the Evaporator Inlet Tubing at the Tee next to the Expansion Valve.
- 6) Lift up the Evaporator, and disconnect the Evaporator Outlet Tubing.
- 7) Install the new Evaporator.
- 8) Install the new Drier.
- 9) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 10) Evacuate the system, and charge it with refrigerant. For water-cooled models, see the Nameplate for the required refrigerant charge. For remote air-cooled models, see the Charge Label in the machine compartment.
- 11) Replace the removed parts in the reverse order of which they were removed.
- 12) Replace the Top Insulation and the panels in their correct positions.
- 13) Turn on the power supply.

8. REMOVAL AND REPLACEMENT OF WATER REGULATING VALVE - WATER-COOLED MODEL ONLY

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

- 1) Turn off the power supply.
- 2) Close the Water Supply Line Shut-off Valve.
- 3) Remove the panels.
- 4) Recover the refrigerant and store it in an approved container.
- 5) Disconnect the Capillary Tube at the Condenser outlet using brazing equipment.
- 6) Disconnect the Flare-connections of the valve.
- 7) Remove the screws and the valve from the Bracket.
- 8) Install the new valve, and braze the Capillary Tube.
- 9) Install the new Drier.
- 10) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 11) Evacuate the system, and charge it with refrigerant. See the Nameplate for the required refrigerant charge.
- 12) Connect the Flare-connections.
- 13) Open the Water Supply Line Shut-off Valve.
- 14) Check for water leaks.
- 15) Replace the panels in their correct positions.
- 16) Turn on the power supply.

9. ADJUSTMENT OF WATER REGULATING VALVE - WATER-COOLED MODEL ONLY

The Water Regulating Valve (also called “WATER REGULATOR”) is factory-adjusted. No adjustment is required under normal use. Adjust the Water Regulator, if necessary, using the following procedures.

- 1) Attach a pressure gauge to the high-side line of the system. Or prepare a thermometer to check for the condenser drain temperature.
- 2) Rotate the adjustment screw by using a flat blade screwdriver, so that the pressure gauge shows 280 PSIG or the thermometer reads 108–117° F, 5 minutes after a freeze cycle or icemaking process starts. When the pressure exceeds 280 PSIG, or the condenser drain temperature exceeds 115° F, rotate the adjustment screw counterclockwise. See Fig. 1 and the chart below.
- 3) Check that the pressure or the condenser drain temperature holds a stable setting.

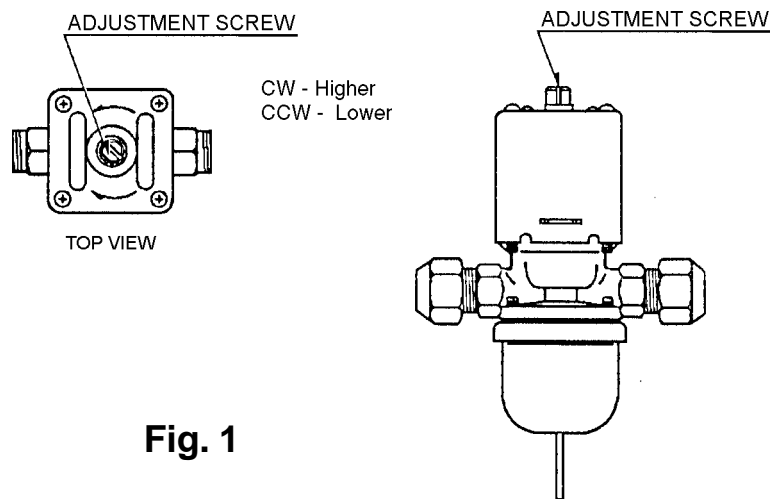


Fig. 1

	PSIG	°F	PSIG	°F	PSIG	°F
WATER TEMP.		50		70		90
AIR TEMP.						
70	275	108	278	108	288	111
90	278	108	285	109	297	113
100	282	110	288	110	308	117

10. REMOVAL AND REPLACEMENT OF CONDENSING PRESSURE REGULATOR (C.P.R.) - REMOTE AIR-COOLED MODEL ONLY

IMPORTANT

Always install a new Drier every time the sealed refrigeration system is opened. Do not replace the Drier until after all other repair or replacement has been made.

- 1) Turn off the power supply.
- 2) Remove the panels from the remote condenser unit.
- 3) Recover the refrigerant and store it in an approved container.
- 4) Before heating, break off the stub on the dome to release the dome charge.
- 5) Disconnect the C.P.R. using brazing equipment.
- 6) Install the new C.P.R. Use nitrogen gas at the pressure of 3-4 PSIG when brazing the C.P.R.

WARNING

Always protect the C.P.R. body by using a damp cloth to prevent the C.P.R. from overheating. Do not braze with the C.P.R. body exceeding 250°F.

- 7) Install the new Drier in the icemaker.
- 8) Check for leaks using nitrogen gas (140 PSIG) and soap bubbles.
- 9) Evacuate the system and charge it with refrigerant. See the Charge Label in the machine compartment in the icemaker.
- 10) Replace the panels in their correct positions.
- 11) Turn on the power supply.

11. REMOVAL AND REPLACEMENT OF THERMISTOR

CAUTION

1. Fragile, handle very carefully.
2. Always use a recommended sealant (High Thermal Conductive Type), Model KE4560RTV manufactured by SHINETSU SILICONE, Part Code 60Y000-11, or Part Code 4A0683-01 equivalent.
3. Always use a recommended foam insulation (Non-absorbent Type) or equivalent.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Remove the Control Box Cover.
- 4) Disconnect the Thermistor leads from the K3 Connector on the Controller Board.
- 5) Remove the Plastic Cable Ties, Foam Insulation, Thermistor Holder and Thermistor. See Fig. 2.

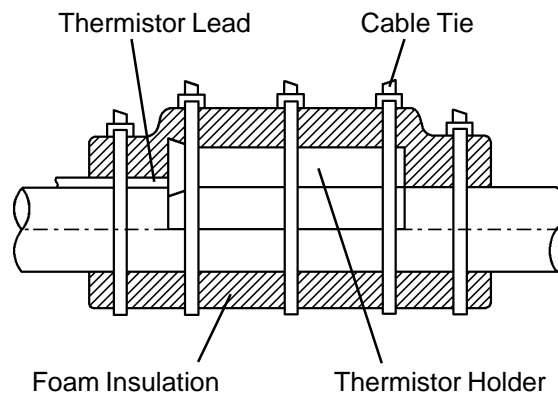


Fig. 2

- 6) Scrape away the old sealant on the Thermistor Holder and the Suction Pipe.
- 7) Wipe off moisture or condensation on the Suction Pipe.
- 8) Smoothly apply recommended sealant (KE4560RTV, Part Code 60Y000-11 or 4A0683-01) to the Thermistor Holder concave.
- 9) Attach the new Thermistor to the Suction Pipe very carefully to prevent damage to the leads. And secure it using the Thermistor Holder and recommended foam insulation.

- 10) Secure the insulation using the Plastic Cable Ties.
- 11) Connect the Thermistor leads through the bushing of the Control Box to the K3 Connector on the Controller Board.

Note: Do not cut the leads of the Thermistor while installing it.

- 12) Replace the Control Box Cover and the panels in their correct positions.
- 13) Turn on the power supply.

12. REMOVAL AND REPLACEMENT OF FAN MOTOR

Note: When replacing a Fan Motor with defective winding, it is recommended that a new capacitor be installed.

- 1) Turn off the power supply.
- 2) Remove the panels.
- 3) Remove the Junction Box Cover from the remote condenser unit (Remote Air-cooled model).
- 4) Remove the closed end connectors from the Fan Motor leads.
- 5) Remove the Fan Motor Bracket and Fan Motor.
- 6) Install the new Fan Motor, and replace the removed parts in the reverse order of which they were removed.
- 7) Replace the panels in their correct positions.
- 8) Replace the Junction Box Cover in its correct position (Remote Air-cooled model).
- 9) Turn on the power supply.

13. REMOVAL AND REPLACEMENT OF WATER VALVE

- 1) Turn off the power supply.
- 2) Close the Water Supply Line Shut-off Valve.
- 3) Remove the Front Panel.
- 4) Remove the Valve Outlet Tubing by releasing the Clamp.
- 5) Remove the Bracket from the unit.
- 6) Remove the Fitting Nut and Water Valve.
- 7) Disconnect the Terminals from the Water Valve.
- 8) Install the new Water Valve, and replace the removed parts in the reverse order of which they were removed.
- 9) Open the Water Supply Line Shut-off Valve.
- 10) Turn on the power supply.
- 11) Check for leaks.
- 12) Replace the Front Panel in its correct position.

14. REMOVAL AND REPLACEMENT OF PUMP MOTOR

- 1) Turn off the power supply.
- 2) Remove the Front Panel.
- 3) Drain the Water Tank by removing the Insulation Panel and the cap at the front of the ice dropping hole. See Fig. 3.
- 4) Replace the removed parts in their correct positions.
- 5) Disconnect the Pump Suction and Discharge Hoses.
- 6) Remove the screws and the Pump Motor Bracket.

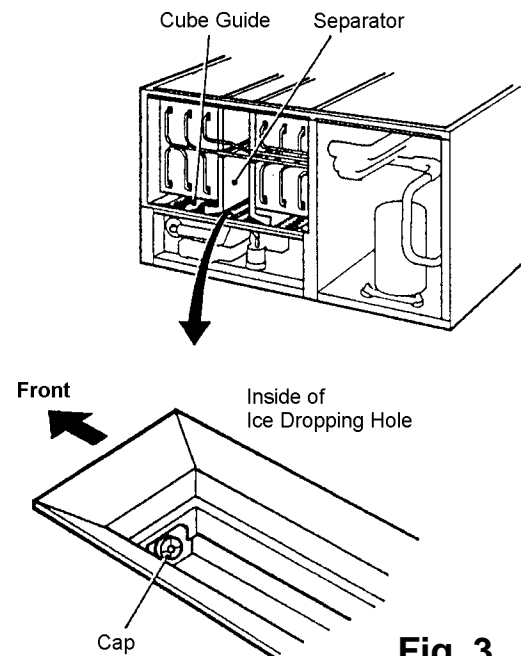


Fig. 3

- 7) Remove the closed end connectors from the Pump Motor leads.
- 8) Remove the two screws and the Pump Motor Bracket.
- 9) Remove the Pump Housing, and check the Impeller.
- 10) If the Impeller is defective, install a new Impeller.
- 11) Install the new motor or new parts, and replace the removed parts in the reverse order of which they were removed.
- 12) Turn on the power supply, and check for leaks.
- 13) Replace the Front Panel in its correct position.

15. REMOVAL AND REPLACEMENT OF SPRAY TUBES

- 1) Turn off the power supply.
- 2) Remove the Front Panel and the Insulation Panel.
- 3) Remove the Rubber Hoses from the Spray Tubes (Water Supply Pipe).
- 4) Release the Clamps, and disconnect the Rubber Hoses.
- 5) Remove the Spray Tubes by squeezing the side tabs.
- 6) Install the new Spray Tubes, and replace the removed parts in the reverse order of which they were removed.
- 7) Replace the panels in their correct positions.
- 8) Turn on the power supply.

VI. MAINTENANCE AND CLEANING INSTRUCTIONS

IMPORTANT

Ensure all components, fasteners and thumbscrews are securely in place after any maintenance or cleaning is done to the equipment.

1. PREPARING THE ICEMAKER FOR LONG STORAGE

WARNING

When shutting off the icemaker for an extended time, drain out all water from the water tank and remove the ice from the Storage Bin. The Storage Bin should be cleaned and dried. Drain the icemaker to prevent damage to the water supply line at sub-freezing temperatures, using air or carbon dioxide. Shut off the icemaker until the proper ambient temperature is resumed.

- When the icemaker is not used for two or three days, it is sufficient to only move the Control Switch to the “OFF” position, unless the icemaker will be at sub-freezing temperatures.

[1] On water-cooled model only, first remove the water from the water-cooled condenser:

- 1) Remove the Front Panel.
- 2) Move the Control Switch, on the Control Box, to the “OFF” position.
- 3) Wait 3 minutes.
- 4) Move the Control Switch to the “ICE” position.
- 5) Allow 5 minutes for the icemaker to fill with water and the Water Pump to start operating.
- 6) Close the Water-cooled Condenser Water Supply Line Shut-off Valve.
- 7) Open the Drain Valve for the water-cooled condenser water supply line.
- 8) Allow the line to drain by gravity.
- 9) Attach compressed air or carbon dioxide supply to the Condenser Water Line Drain Valve.
- 10) Quickly blow the water-cooled condenser out using compressed air or carbon dioxide until water stops coming out.

[2] Remove the water from the potable water supply line:

- 1) Remove the Front Panel. (Except water-cooled model)
- 2) Move the Control Switch, on the Control Box, to the "OFF" position.
- 3) Wait 3 minutes.
- 4) Close the Potable Water Supply Line Shut-off Valve and open the Potable Water Supply Line Drain Valve.
- 5) Allow the line to drain by gravity.
- 6) Attach compressed air or carbon dioxide supply to the Potable Water Line Drain Valve.
- 7) Move the Control Switch to the "ICE" position.
- 8) Blow the potable water line out using compressed air or carbon dioxide.

[3] Drain the Potable Water Tank:

- 1) Turn off the power supply.
- 2) Move the Control Switch to the "OFF" position.
- 3) Drain the Water Tank by removing the Insulation Panel and the Cap located on the front bottom part of the Ice Dropping Hole. See Fig. 4.
- 4) Replace the removed parts in their correct positions.
- 5) Remove all ice from the Storage Bin, and clean the Storage Bin.
- 6) Replace the Front Panel in its correct position.
- 7) Close the Drain Valve.

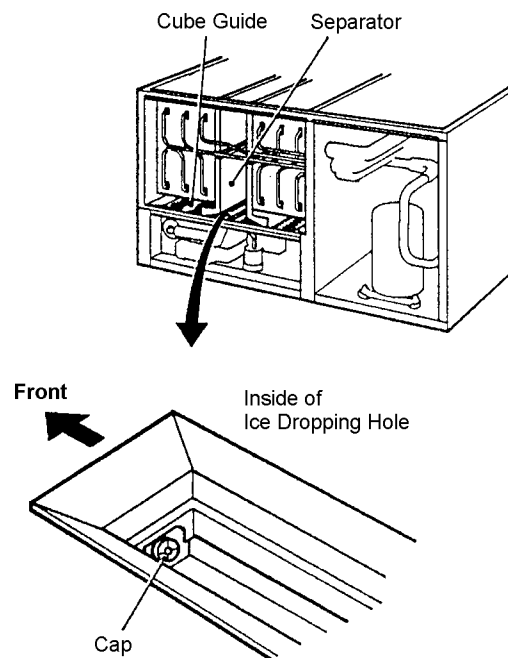


Fig. 4

2. CLEANING PROCEDURE

IMPORTANT


Ensure all components, fasteners and thumbscrews are securely in place after any maintenance or cleaning is done to the equipment.

WARNING

1. HOSHIZAKI recommends cleaning this unit at least once a year. More frequent cleaning, however, may be required in some existing water conditions.
2. To prevent injury to individuals and damage to the icemaker, do not use ammonia type cleaners.
3. Always wear liquid-proof gloves for safe handling of the cleaning and sanitizing solution. This will prevent irritation in case the solution comes into contact with skin.

IMPORTANT

1. The Cleaning Valve is used to allow solution flow to the inside of the Evaporator during the cleaning and sanitizing operation. It should be closed for all icemaking operation. The Compressor will not operate unless this valve is completely closed.
2. To open the Cleaning Valve, the Valve Handle should be parallel to the valve body. To close the valve, the Valve Handle should be at a right angle to the valve body.

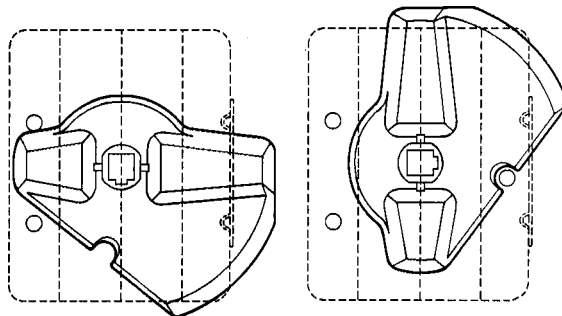

CLOSED POSITION

OPEN POSITION

[a] CLEANING PROCEDURE

1) Dilute 27 fl. oz. of the recommended cleaner Hoshizaki "Scale Away" or "LIME-A-WAY" (Economics Laboratory, Inc.) with 5 gal. of water.

2) Remove all ice from the Evaporator and the Storage Bin.

Note: To remove cubes on the Evaporator, turn off the power supply and turn it on after 3 minutes. The defrost cycle starts and the cubes will be removed from the Evaporator.

3) Turn off the power supply.

4) Remove the Front Panel and then remove the Insulation Panel, by first removing the thumbscrew, lifting the panel slightly and pulling it toward you.

5) Drain the Water Tank by removing the Cap located on the front bottom part of the Ice Dropping Hole. See Fig. 4.

6) After tank has drained, replace the removed parts in their correct positions.

7) Pour the cleaning solution into the Water Tank.

8) Fully open the Cleaning Valve on the left side wall of the machine compartment.

9) Move the Control Switch, on the Control Box, to the "WASH" position.

10) Replace the Insulation Panel and the Front Panel in their correct positions.

11) Turn on the power supply, and start the washing process.

12) Turn off the power supply after 30 minutes.

13) Remove the Front Panel and the Insulation Panel.

14) Drain the Water Tank. (See the above step 5).

15) Replace the tubing and the Insulation Panel in their correct positions.

16) Move the Control Switch to the "ICE" position.

17) Close the Cleaning Valve.

Note: The icemaker will not operate unless the Cleaning Valve is completely closed.

18) Replace the Front Panel in its correct position.

- 19) Turn on the power supply to fill the Water Tank with water.
- 20) Turn off the power supply after 3 minutes.
- 21) Remove the Front Panel, and fully open the Cleaning Valve.
- 22) Move the Control Switch to the "Wash" position.
- 23) Replace the Front Panel in its correct position.
- 24) Turn on the power supply to rinse off the cleaning solution.
- 25) Turn off the power supply after 5 minutes.
- 26) Remove the Front Panel and Insulation Panel.
- 27) Drain the Water Tank by removing the Cap located on the front bottom part of the Ice Dropping Hole. See Fig. 4.
- 28) After the tank has drained, replace the removed parts in their correct positions.

Note: Do not replace the Insulation Panel when you proceed to "[b] SANITIZING PROCEDURE."

- 29) Repeat the above steps 16) through 28) three more times to rinse thoroughly.

Note: If you do not sanitize the icemaker, go to step 9) in "[b] SANITIZING PROCEDURE."

[b] SANITIZING PROCEDURE - Following Cleaning Procedure

- 1) Dilute a 5.25% Sodium Hypochlorite solution (chlorine bleach) with water (Add 2.5 fl. oz. of sanitizer to 5 gal. of water).
- 2) Remove the Insulation Panel, if it is in its normal position.
- 3) Pour the sanitizing solution into the Water Tank.
- 4) Replace the Insulation Panel and the Front Panel in their correct positions.

Note: Make sure that the Control Switch is in the "WASH" position and the Cleaning Valve is in the "Open" position.
- 5) Turn on the power supply, and start the sanitizing process.
- 6) Turn off the power supply after 15 minutes.
- 7) Remove the Front Panel and if necessary, the Insulation Panel.
- 8) Drain the Water Tank. See the above step 5) in "[a] CLEANING PROCEDURE."
- 9) Replace the removed parts and the Insulation Panel in their correct positions.
- 10) Repeat the above steps 16) through 28) in "[a] CLEANING PROCEDURE" two times to rinse thoroughly.
- 11) Close the Cleaning Valve.
- 12) Move the Control Switch to the "ICE" position.
- 13) Replace the Front Panel in its correct position.
- 14) Clean the Storage Bin with water.
- 15) Turn on the power supply, and start the automatic icemaking process.

3. MAINTENANCE

IMPORTANT

This icemaker must be maintained individually, referring to the instruction manual and labels provided with the icemaker.

1) Stainless Steel Exterior

To prevent corrosion, wipe the exterior occasionally with a clean and soft cloth. Use a damp cloth containing a neutral cleaner to wipe off oil or dirt build up.

2) Storage Bin and Scoop

- Wash your hands before removing ice. Use the plastic scoop provided.
- The Storage Bin is for ice use only. Do not store anything else in the bin.
- Keep the scoop clean. Clean it by using a neutral cleaner and rinse thoroughly.
- Clean the bin liner by using a neutral cleaner. Rinse thoroughly after cleaning.

3) Condenser (Except water-cooled model)

Check the Condenser once a year, and clean if required by using a brush or vacuum cleaner. More frequent cleaning may be required depending on the location of the icemaker.